


Stress Distribution in Welded Flange-Bolted Web Connections

by


Garth B. Berninghaus

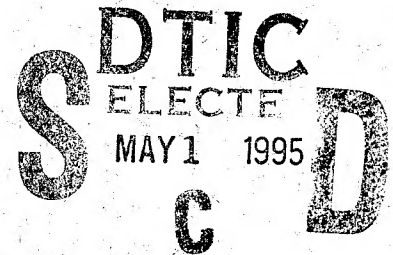

A thesis submitted in partial fulfillment
of the requirements for the degree of

Master of Science in Civil Engineering

University of Washington



1995

Approved by Charles W. Ford
(Chairperson of Supervisory Committee)

Program Authorized
to Offer Degree Department of Civil Engineering

Date MARCH 16, 1995

19950428 032

DTIC QUALITY INSPECTED 8

Stress Distribution in Welded Flange-Bolted Web Connections

by

Garth B. Berninghaus

A thesis submitted in partial fulfillment
of the requirements for the degree of

Master of Science in Civil Engineering

University of Washington

1995

Accession For	
NTIS CRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By <u>Per Form 50</u>	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
<u>A-1</u>	

Approved by Charles W. Pord
(Chairperson of Supervisory Committee)

Program Authorized
to Offer Degree Department of Civil Engineering

Date MARCH 16, 1995

In presenting this thesis in partial fulfillment of the requirements for a Master's degree at the University of Washington, I agree that the Library shall make its copies freely available for inspection. I further agree that extensive copying of this thesis is allowable only for scholarly purposes, consistent with "fair use" as prescribed in the U.S. Copyright Law. Any other reproduction for any purposes or by any means shall not be allowed without my written permission.

Signature_____

Date_____

TABLE OF CONTENTS

List of Figures	iii
List of Tables.....	v
Chapter 1: Introduction	1
1.1 Background	1
1.2 Present Seismic Design Philosophy	3
1.3 Problem Overview and Objectives	4
Chapter 2: Research History	8
2.1 Shear Behavior of Joints	8
2.2 Supplemental Web Welds.....	10
2.3 Ductility/Plastic Rotation Capacity.....	11
2.4 Objectives.....	13
Chapter 3: Development of Computer Models	16
3.1 Local Model	16
3.2 Model Geometry	16
3.3 Loading	18
3.4 Parameters.....	19

Chapter 4: Results of the SAP90 Computer Analysis.....	27
4.1 General Discussion	27
4.2 Column Stiffener Models.....	28
4.3 Column Flange Models.....	31
4.4 Beam Cope Models	33
4.5 Column Web Models	35
Chapter 5: Summary and Conclusions.....	49
Bibliography.....	51
Appendix A: SAP90 Input File for Model 1	53

LIST OF FIGURES

<i>Number</i>	<i>Page</i>
1. Welded Flange - Bolted Web Detail	7
2. Local Kinks Outside Joint.....	14
3. Supplemental Weld Requirements.....	15
4. SAP90 Model.....	21
5. Cope Elements Omitted	22
6. Loading Scheme.....	23
7. Load Application Points.....	24
8. Cope Models	26
9. Deformed Shape: Model 1	38
10. Stiffener Models: Bottom Flange Stress Results at Groove Weld.....	39
11. Stiffener Models: Bottom Flange Stress Results at 1.5" from Groove Weld.....	40
12. Stiffener Models: Bottom Flange Stress Results at 3" from Groove Weld.....	41
13. Stiffener Models: Top Flange Stress Results at Groove Weld	42

14.	Stiffener Models: Top Flange Stress Results at 1.5" from Groove Weld	43
15.	Column Flange Models: Bottom Flange Stress Results at Groove Weld	44
16.	Column Flange Models: Bottom Flange Stress Results at 1.5" from Groove Weld	45
17.	Column Flange Models: Top Flange Stress Results at Groove Weld	46
18.	Column Flange Models: Top Flange Stress Results at 1.5" from Groove Weld	47
19.	Beam Cope Models: Bottom Flange Stress Results at Groove Weld	48

LIST OF TABLES

<i>Number</i>		<i>Page</i>
1.	SAP90 Models	25
2.	Stress Results: Model 1	36
3.	Displacement Results: Model 1	37

ACKNOWLEDGMENTS

The author wishes to express sincere thanks to Professor Charles W. Roeder for his assistance in the preparation of this manuscript and the work that lies behind it.

Also a special thanks to my wife, Monica, for her support throughout my graduate studies.

Chapter 1: Introduction

1.1 Background

In the design of a building it is necessary to satisfy serviceability requirements to avoid functional failure. In buildings which may be subjected to earthquakes, serviceability requirements impose the need to keep the response of the structure in the elastic range and to limit the story drift under moderate earthquakes which may occur several times during the life of the structure.

In the case of an extreme earthquake, structural failure of the building must be prevented. This imposes additional demands on the ability of the structure to absorb and ultimately dissipate (by structural and non-structural action) energy input into the structure by ground motion. The manner in which these energy requirements are met varies with the structural system used. The system most widely used, in seismic regions, for buildings up to about 25 stories is the unbraced, moment-resistant multistory steel frame.

In general, multistory unbraced steel frame buildings are designed to respond elastically to gravity, wind, and earthquake loads as specified in various building codes. But buildings designed for code seismic forces must be expected to undergo cyclic deformations well into the inelastic range during a severe earthquake [1]. For such situations the amount of energy that the structural system can dissipate through inelastic deformation becomes the controlling design factor.

To avoid structural failure under an extreme earthquake, every member and connection of a moment resistant frame has to be designed such that its ductility allows a redistribution of moments without failure of the member or connection. Moment-resistant frames achieve ductile response through flexural yielding of the beams or shear yielding of the column panel zones. The beam-to-column connections must be capable of developing and maintaining the strength of the beams or panel zones as they undergo large cyclic inelastic deformations.

One of the most widely used moment connection details in current U.S. practice for seismic-resistant framing is the welded flange-bolted web detail shown in Figure 1. The beam web is bolted to a single plate shear tab that is shop welded to the column flange, and the beam flanges are then field welded to the column using complete-penetration single-bevel groove welds with back-up bars. The primary purpose of the back-up bar, when used in a full-penetration weld, is to support the molten weld metal during solidification. A secondary benefit is protection from atmospheric contamination on the underside or root of the weld. Most major U.S. model seismic codes adopted this detail as a standard for ductile steel moment frames, and it has been used for many years.

1.2 Present Seismic Design Philosophy

The demands for serviceability under moderate earthquakes, and for structural safety under severe earthquakes, impose requirements on the strength, stiffness, and ductility of structural components in building frames.

Serviceability requirements are usually met by providing components with sufficient strength and stiffness to assure essentially elastic response behavior and limited story drift that prevents excessive nonstructural damage under moderate earthquakes.

An explicit design for the forces and inelastic deformations that can be expected under hypothetical severe earthquakes for a given site and building can be carried out, but such a procedure is the exception rather than the rule. It is more customary to follow a series of design recommendations that are intended to assure sufficient strength and deformation capacity to provide an adequate factor of safety against failure. Basic strength criterion for connections was stated by Johnson [2]: "The joint, together with the immediately adjoining portions of the members, must be capable of plastic hinge actions. This means that relative motion between the members must be possible at an approximately constant moment of resistance."

It is generally accepted that girders rather than columns are the elements best suited to tolerate large inelastic deformations without failure, and to absorb

and dissipate the largest share of the seismic energy imparted to the structure. This leads to the widely accepted strong column-weak girder concept in which the members are sized such that plastic hinges will occur in the girders rather than in the columns. Forcing the inelastic deformations to occur in the girders, however, places a heavy burden on the beam-to-column connections which must be sufficiently strong and ductile to permit the development of plastic hinges. Based on past experience, and supported by experimental evidence, this has led in highly seismic areas to frequent use of the welded flange-bolted web connection. The full penetration groove welds used were considered to be adequate to develop the full plastic moment, M_p , of the beam. The primary function of the beam web connection is to transfer the ultimate shear force due to gravity and seismic effects.

1.3 Problem Overview and Objectives

The Northridge Earthquake was the second most costly natural disaster in U.S. history, trailing only behind Hurricane Andrew, according to one of the country's leading structural investigators [3]. Because the epicenter was in a heavily built-up area, there was three to four times as much damage as in San Francisco during the Loma Prieta Earthquake in 1989 [3].

There is currently no accurate count of steel-building related damage, but various reports indicate that localized structural damage has been identified in over

120 buildings. A majority of the reported problems were in special steel moment frame connections that consisted of welded flange-bolted web connections. Many of these special moment frames were arranged in two-bay configurations that only partially enclosed the building perimeter. Ductile yielding was intended to occur in the beams. However, fracture in the region of this field welded connection, and some accompanying fractures of the column, occurred mostly in the vicinity of the beam bottom flange connection. Cracking was initiated in the region of the flange weld near the root at the back-up bar and then propagated into the adjacent supporting column or the beam flange weld. This primary bottom flange fracture was accompanied, in some cases due to the force redistribution, by secondary cracking of the beam web shear plate, fracture of the web plate bolts, and/or top beam flange damage. In a few cases the crack propagated entirely through either the beam or the column. There was no other observable general pattern to these moment connection failures. Reported structural damage ranged from none or relatively few to many connection fractures per floor level and included mostly low and some high-rise buildings.

Various opinions and considerations have been expressed on the observed problems. Although uncertainties about the effects of site specific ground motion persist, one possible cause of these connection fractures is the unexpected high

stress concentrations in the beam flange-to-column connection. This stress concentration rendered the complete penetration flange welds to be more susceptible under cyclic load reversals to crack propagation originating from any initial notches, inadequate weld fusion/penetration, or other imperfections, including the naturally occurring notch-like condition that results from a properly fused but left-in-place steel backing bar. Despite initial appearances of connection symmetry, the bottom beam flange weld was consistently more critical than its top flange counterpart. Several feasible explanations have been proposed for these differences: increased sensitivity from the weld root at the lower extreme fiber; welding workmanship difficulties such as beam web interference (cope holes); and the additional presence of beneficial restraint at the top in the form of the concrete floor slab. Indications are that the steel beam and column material complied with applicable ASTM requirements. However, unusually high A36 material yield strengths combined with lower tensile ultimate to yield ratios could have unexpectedly caused the beam yielding to be concentrated within the welded and coped portion of the beam.

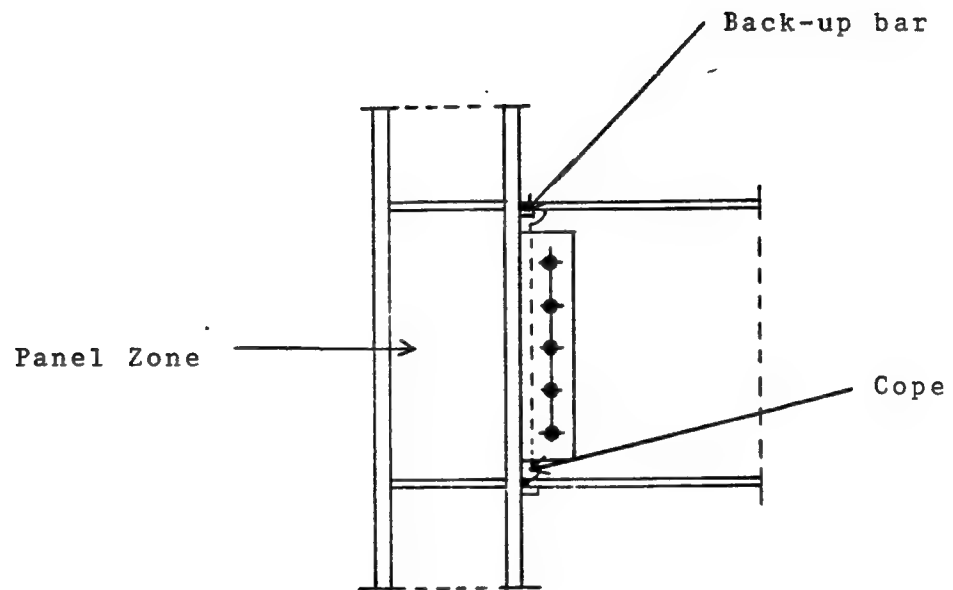


Figure 1. Welded Flange - Bolted Web Detail

Chapter 2: Research History

2.1 Shear Behavior of Joints

The shear behavior of beam-column joints has been the subject of several experimental studies conducted by Krawinkler, Bertero, and Popov in 1971 [1] and 1973 [4]. The shearing stresses in the panel zone, Figure 1, caused by lateral loading are highest at the center of the panel, with a moderate but definite drop towards the four corners [1]. When beam-column joints were stressed beyond the elastic range, yielding in the panel propagated rather slowly from the center towards the level of the beam flanges [1]. This is reflected in the load-deformational response of the joints, which exhibits an elastic range, followed by a range of gradually decreasing stiffness, and then stabilizes to a small and almost constant stiffness for a long range of deformation. The latter stiffness is a result of strain-hardening in the material. The transition range between elastic stiffness and strain-hardening stiffness is due to the fact that not only the panel zone in the joint resists the shear; the elements surrounding the panel zone also contribute significantly to this resistance. In particular, the bending resistance of the column flanges and the in-plane stiffness of the beam webs adjacent to the joint contribute to resistance. Experimental studies [1] have shown that shear yielding spreads to the corners of the panel zone usually only at large angles of distortion.

All of the joints tested in reference [4] exhibited remarkable ductility and very stable and repetitive hysteresis loops under cyclic loading. No drop in strength was noticeable even at extremely large inelastic distortions, although in some specimens with thin panel zones local buckling in the panel zone was observed. This failure mode is easily suppressed by adding column web doubler plates or diagonal panel zone stiffeners. The only detrimental effect caused by excessive joint distortions was the formation of local kinks in the beam and column flanges outside the joint as shown in Figure 2. These kinks caused high strain concentrations at the regions where the beam flanges were welded to the column, which in turn may have led to the observed fracture of material immediately adjacent to the weld or at the cope. However, this fracture only occurred after several load reversals at extremely large joint distortions in the tests reported.

In all specimens tested, [1] and [4], the post-yield stiffness and strength differed remarkably from specimen to specimen. These same tests also showed that the post-yield strength and stiffness of joints depends on the stiffness of the elements surrounding the panel zone, primarily the flexural stiffness of the column flanges, and the aspect ratio d_b/d_c . Experimental evidence [1] has shown that the column flanges take a larger percentage of the column axial load once the panel

zone starts to yield in shear. Clearly, this only holds true for columns in which the flanges have the necessary capacity to resist the full axial load plus eventual bending stresses in the yielded joint region. These factors, column flange thickness and aspect ratio d_b/d_c , as well as the stiffness of the beams and column outside the joint area, strongly affect the extent of yielding in the panel zone. The tests conducted, [1] and [4], showed that when beam-column joints are designed with adequate column flange stiffness and relatively low aspect ratio d_b/d_c , beam-column joints provided excellent energy dissipation.

2.2 Supplemental Web Welds

The performance of the welded flange-bolted web connection under cyclic loading was studied by Tsai and Popov [5] in 1988 using large-scale test specimens. In general, all specimens carried loads well above the 36 ksi nominal yield strength of the beams. Welding procedure and workmanship were shown to be critical in the performance of the connection. Variability in the ductility of the connection was observed in many circumstances and was attributed to the bolted web connection's limited ability to transfer bending moment, resulting in excessive demands on the beam-flange connections. As a result of this concern, U.S. model seismic codes; [6], [7], [8], and [9] require that in addition to web bolts, supplemental welds be provided between the beam web and the shear tab for

beam sections with $Z_f/Z_t \leq 0.70$ as shown in Figure 3. Z_t is the beam's total plastic section modulus, and Z_f is the plastic section modulus of the beam flanges only.

The supplemental web welds must be designed to develop at least 20% of the beam web's flexural strength. These provisions recognize that the web connection must be capable of carrying not only shear force, but also a portion of the beam's bending moment. These new provisions are based on rather limited data, and according to reference [6], were chosen "until additional data are available."

2.3 Ductility/Plastic Rotation Capacity

For seismic applications, the ductility developed in the beam or panel zone prior to connection failure is a critical measure of performance. Various measures of ductility have been used in the past, including plastic rotation angles and energy dissipation. Whatever measure of ductility is chosen, an estimate of the actual deformation demands on the connections in buildings during earthquakes is needed. Unfortunately, this information is rather limited.

In 1993 an experimental investigation was undertaken by Engelhardt and Hussain [10] to collect additional data on the effect of the Z_f/Z_t ratio and the web connection detail. Their specific objective was to determine if relaxation of the supplemental web welding requirements could be justified based on additional experimental data. Results were presented in the context of plastic rotation

capacity and a value of 0.015 radian was chosen as a reasonable estimate of beam plastic rotation demand in steel moment-resisting frames subject to severe earthquakes. It should be noted that actual beam plastic rotation demands are quite sensitive to frame design assumptions, frame inelastic modeling assumptions, and the chosen earthquake records. Thus, the choice of 0.015 radian was based on considerable judgment and interpretation of available data. Past experimental programs [11] and [5] appear to have used similar levels of plastic rotation to evaluate performance of specimens. It should also be noted that at joints in which the column panel zone can effectively take part in developing inelastic deformations, the plastic rotation demand on the beam is substantially reduced.

Based on the criterion of 0.015 radian of beam plastic rotation at the connection measured from the original undeformed position, the performance of the eight specimens tested in reference [10] was unsatisfactory overall. Only one of the eight specimens achieved 0.015 radian of plastic rotation. All other specimens were judged as marginally acceptable, with plastic rotations varying from 0.009 radian to 0.013 radian. Although the test results showed some effect of web-connection details on strength, there was no clear evidence from the test data on the influence of the Z_f/Z_t ratio or the web connection details on ductility. Overall, variability in the performance of the beam flange welds appears to have

had a much greater influence on plastic rotation capacity than Z_f/Z_t ratio or web-connection details. It is important to note that all test specimens in this program were constructed by a commercial steel fabricator, all welders were certified, and all groove welds were ultrasonically tested by an independent welding-inspection firm. Nonetheless, a number of welds were found to be inadequate when the connections were tested to destruction.

2.4 Objectives

Past experimental evidence, outlined in Sections 2.1 through 2.3, has shown that, when properly designed, beam-column joints provide excellent energy dissipation qualities. These sections have also shown that the flange weld area is used to transfer the majority of the beam moment to the column and is thus an area of high stress concentrations. As a result, when any section or component of the joint is improperly designed or fails to perform in the expected manner, the flange weld area is forced to carry even more of the load resulting in an even higher stress concentration.

This study was initiated to develop a computer model to analyze the stress state of a typical welded flange-bolted web connection. Various parameters within the model could then be varied in an attempt to determine and quantify which parameters most greatly affect the stress concentrations in the flange weld area.

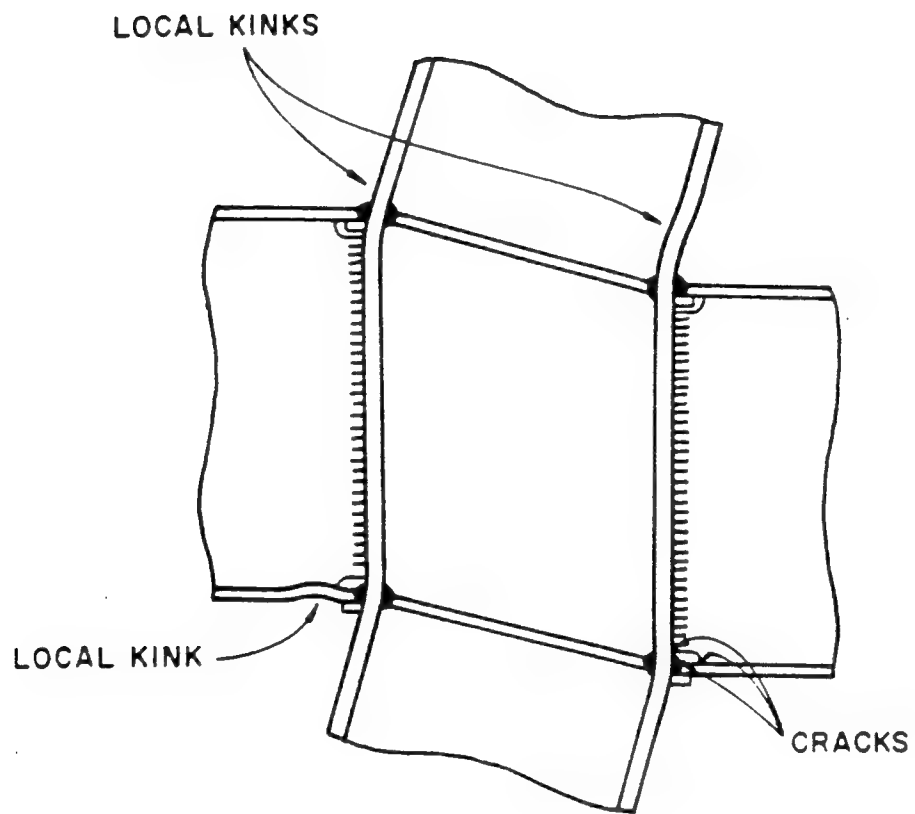


Figure 2. Local Kinks Outside Joint

Chapter 3: Development of Computer Models

3.1 Local Model

Computer models were developed to facilitate investigation into the high stress concentrations found in the bottom beam flange weld. The SAP90 [12] finite element structural analysis program was used to construct these local models. No global model was used because the goal of this study was not an analysis of one particular structure, but rather the goal was to investigate general trends in the connection itself as several parameters were varied. Static, linear, analyses were used to accomplish this goal.

3.2 Model Geometry

The model constructed is shown in Figure 4. Shell elements were used for the entire model with both membrane behavior and plate-bending behavior being included in the analysis. Mesh sizes ranged from 1/2" to 3" depending on the region under consideration. In regions at or near flange connection points, the finer mesh was used while the mesh became more coarse as the distance from the flange connection points increased. All elements used were four node elements. Three node elements were avoided because of the resulting decrease in accuracy of stress output results.

Member sizes used were W12 x 136 for the column and W24 x 55 for the beam. The erection clip was modeled as a 1/2" thick steel plate. The gap between

THIS
PAGE
IS
MISSING
IN
ORIGINAL
DOCUMENT

the beam web and column flange was modeled as 1/2". The member sizes and geometry matches typical specimens used in reference [10].

The complete-penetration, single-bevel, groove welds were modeled by connecting the beam flange elements to the column flange elements. The welded portion of the erection clip was also modeled by direct connection of erection clip elements to the appropriate column flange elements.

The erection plate bolts were modeled by using the constraints feature of the program which allows the user to specify that joints may be constrained such that they have the same translations and rotations in the X, Y, and Z directions. Six bolts were used to attach the erection clip to the beam web which resulted in six pairs of constrained joints. Only the translations were constrained while the rotations were left free.

Copes or cope holes are used to allow access for the welder as shown in Figure 1. Dimensions are given in terms of a cope radius which is a function of the beam web thickness as specified in the American Welding Society (AWS) code [13]. For the W24 x 55 beam used in all models, the minimum allowable cope radius is .395". There are no upper limits on cope size. Copes were modeled by omitting elements in the appropriate locations of the beam web as shown in

Figure 5. This resulted in a square or rectangular cope rather than the typical circular one.

Column stiffeners were modeled as rigidly connected (welded) on all three sides of contact. They extended to the full width of the column flange and were symmetrical about both sides of the column web for a total of four stiffeners. They were located in the same horizontal plane as the beam flanges.

3.3 Loading

The model was loaded as shown in Figure 6. The relative magnitude of each load was determined by normalizing the beam moment (M_b) to equal the elastic section modulus of the beam. In anticipation of further work with this model in which the beam size would be changed, this normalization was chosen to facilitate comparison between models. In this case, the beam moment was equal to 114 k-in. Typically beam shear (V_b) for this type of connection falls within the range of $1/10(M_b/d_b)$ to $1/5(M_b/d_b)$. A mid-range value of $2/15(M_b/d_b)$ was selected. Equilibrium calculations were used to determine the appropriate values for the column moment (M_c) and the column shear (V_c). Column axial loads (P) are frequently in the range of 45% of the yield stress (F_y). To correspond with the normalization of the beam moment, a column axial load of 45% of 1 ksi was used.

All loads were applied as point loads as shown in Figure 7. The modulus of elasticity was taken as 29,000 ksi and the value used for Poisson's ratio was 0.3.

3.4 Parameters Varied

A total of 15 models were developed, as shown in Table 1, and tested in this study to determine the effect of various parameters on the stress distribution. Each model varied only one parameter from the original model (Model 1) so that trends or changes in the beam flange stress distribution would be easily attributed to the appropriate variable. Models within a given parameter grouping could then be compared with one another as well as the original model (Model 1).

Models 2, 3, 10, 11, and 12 were developed to determine if the size of the cope had an effect on the beam flange stress distribution. Model 1 had no cope, and it only had the constant 1/2" gap between the beam web and column flange. Model 2, which represented a typical coped connection, had one shell element removed at the bottom of the beam web corner and one shell element removed at the top to model the cope holes. Figure 8 shows the elements removed in Models 2, 3, 10, 11, and 12.

Models 4, 5, 14, and 15 were created to investigate effects of variation in the thickness of the column flange. Model 4 had a column flange thickness equal

to 50% that of Model 1 while Models 5, 14, and 15 had respective column flange thicknesses equal to 200%, 75%, and 150% that of Model 1.

Models 6 and 7 were used to check for changes in stress distributions caused by variation in the column web thickness. Model 6 had a column web thickness equal to 50% that of the Model 1 column web thickness while the Model 7 thickness was 200% that of Model 1.

Models 8, 9, and 13 were used to check for any effects of adding web stiffeners (continuity plates) to the column web. Model 8 used column web stiffeners with thicknesses equal to 50% of the beam flange thickness while Models 9 and 13 used 100% and 200% respectively.

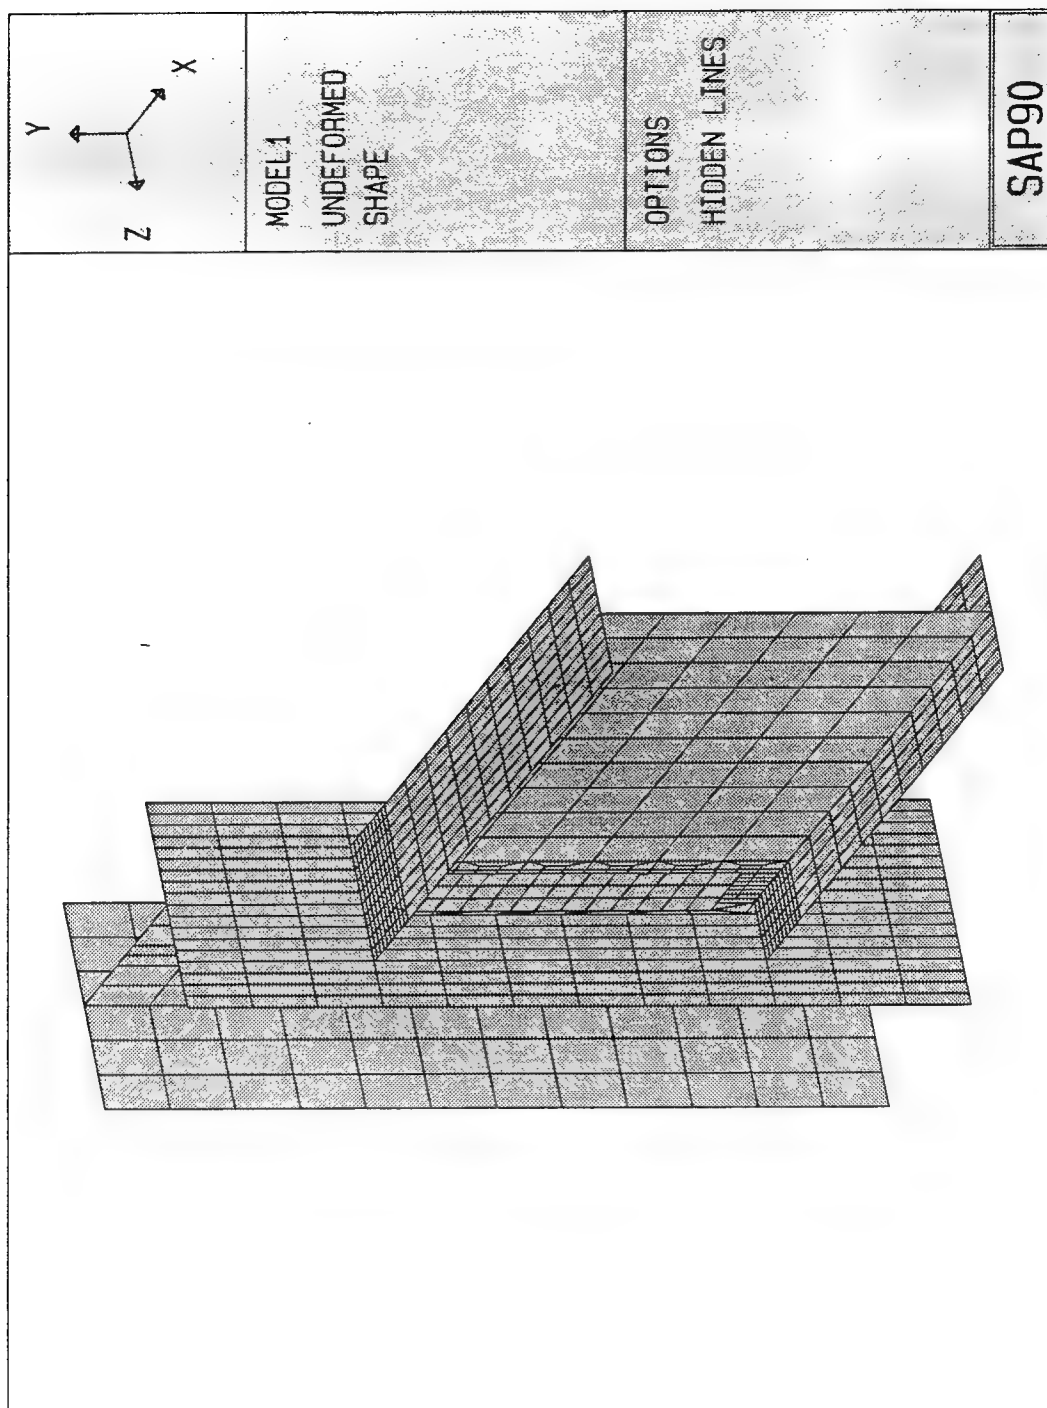


Figure 4. SAP90 Model

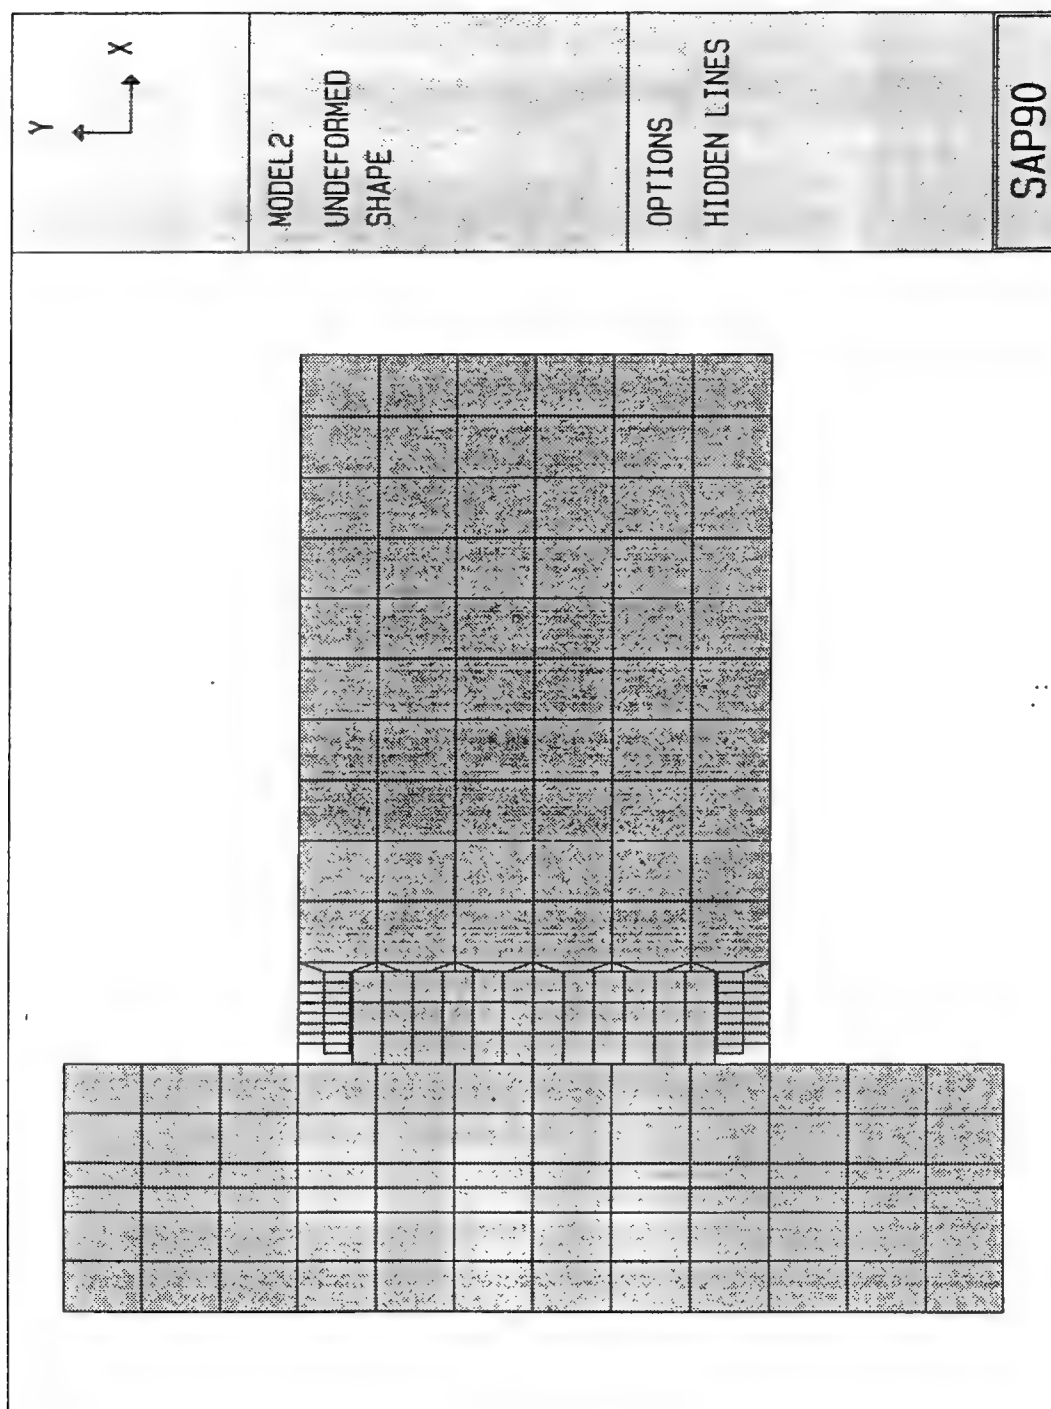


Figure 5. Cope Elements Omitted

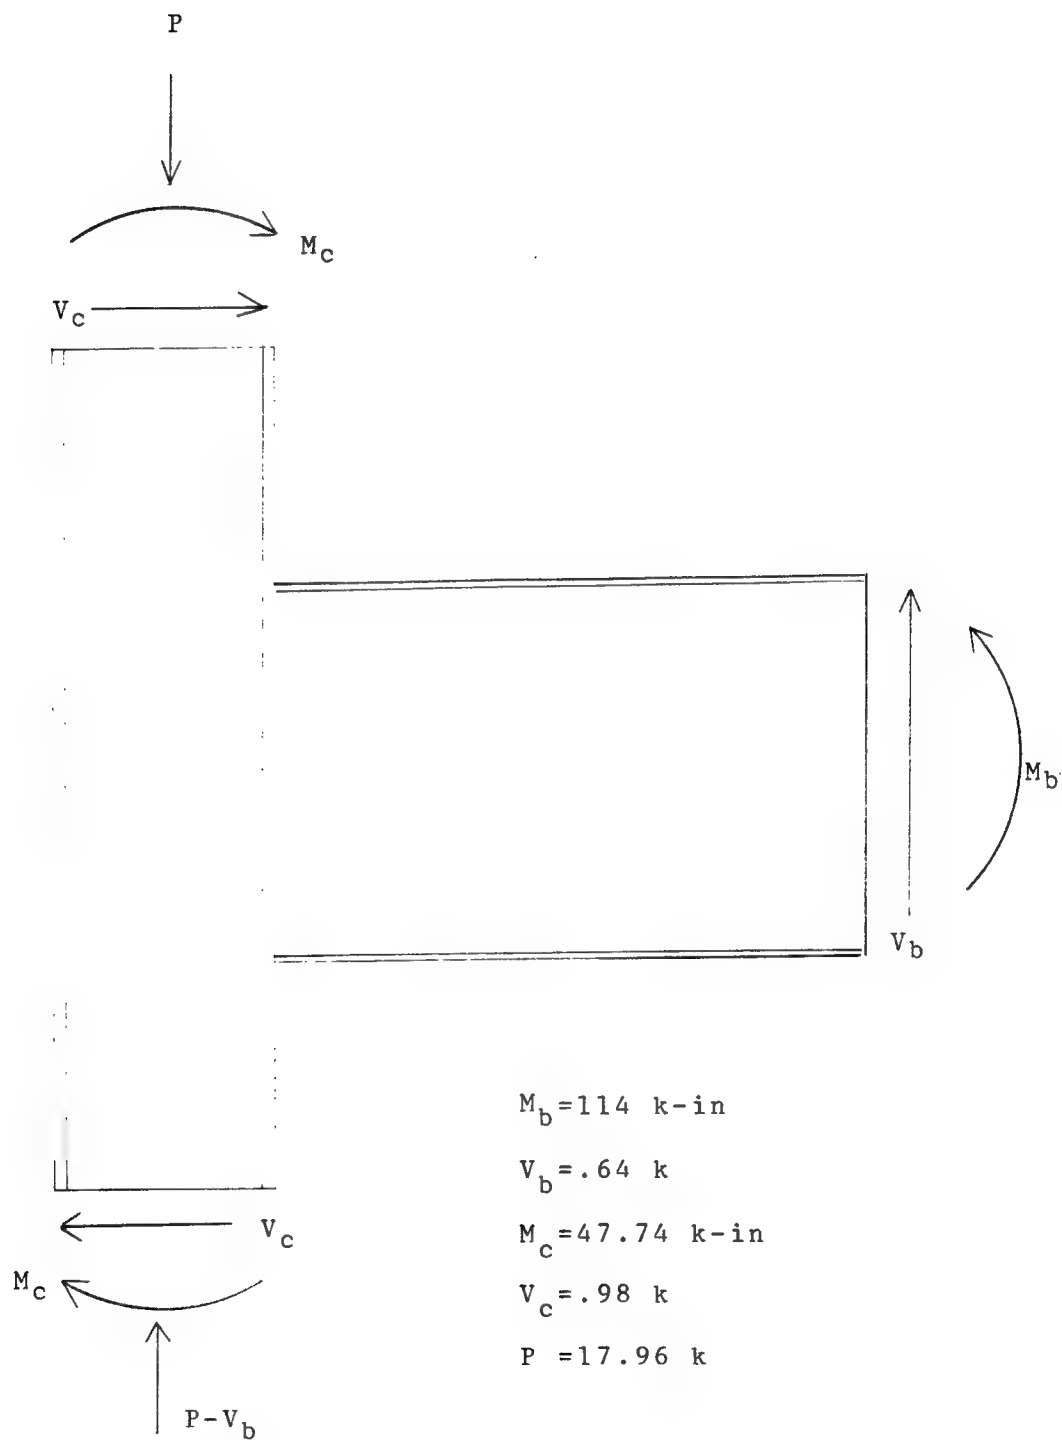


Figure 6. Loading Scheme


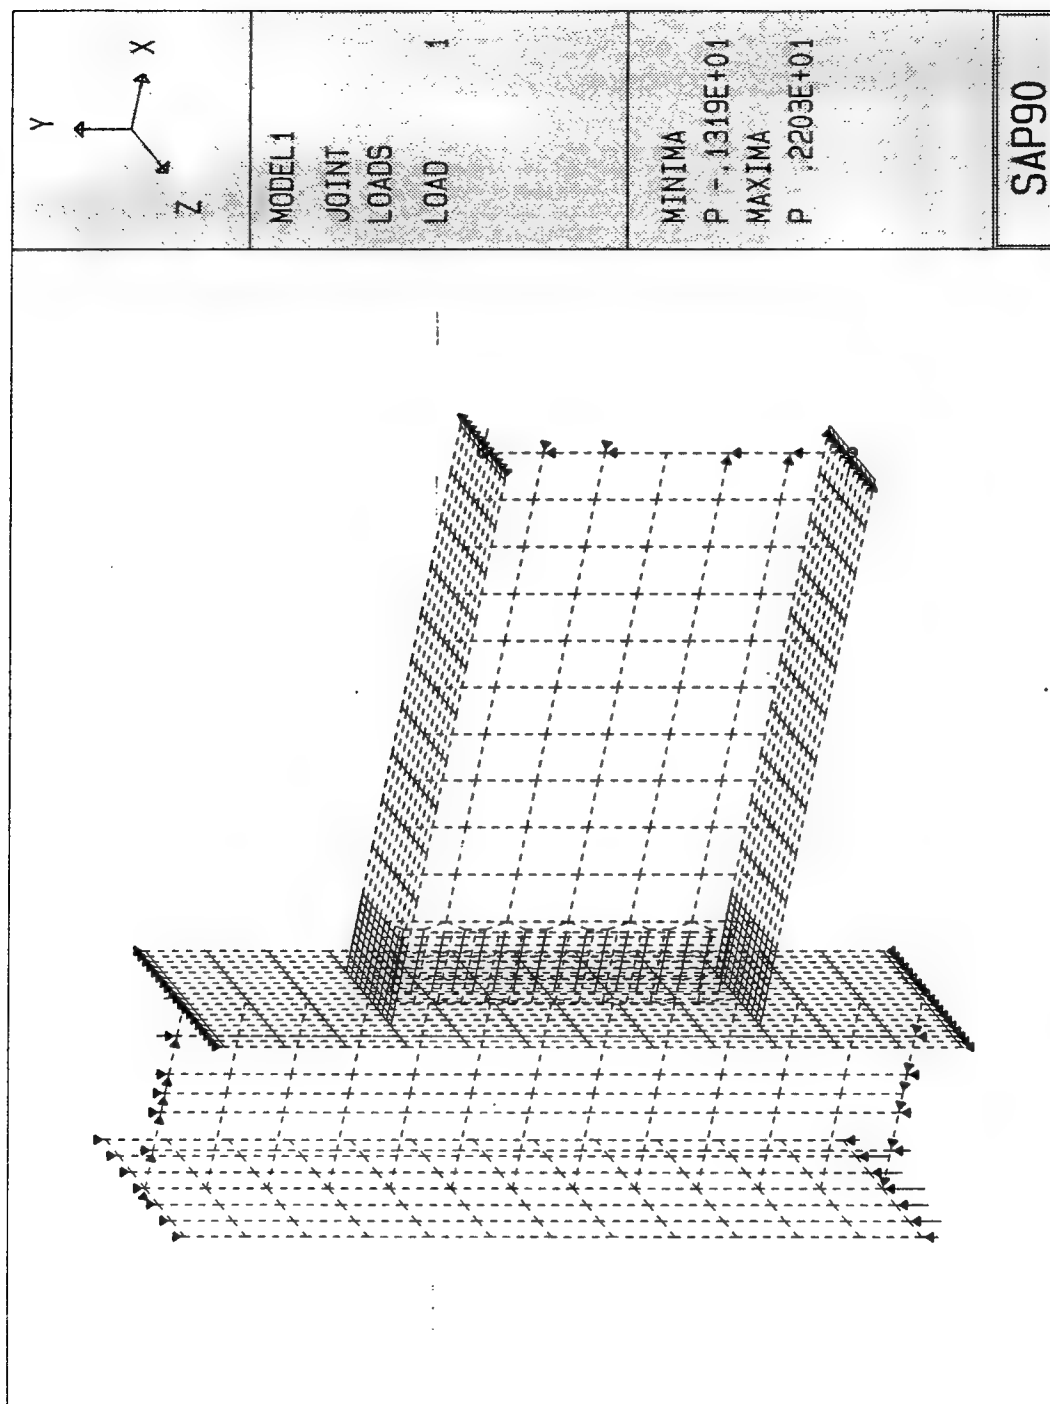



Figure 7. Load Application Points

Table 1. SAP90 Models


<u>Model Number</u>	<u>Description</u>
1	Original
2	One cope element removed
3	Two horizontal cope elements removed
4	Column flanges 50% of Model 1
5	Column flanges 200% of Model 1
6	Column web 50% of Model 1
7	Column web 200% of Model 1
8	Column stiffeners with thickness 50% of beam flange
9	Column stiffeners with thickness 100% of beam flange
10	Three horizontal cope elements removed
11	Two vertical cope elements removed
12	Two vertical and two horizontal cope elements removed
13	Column stiffeners with thickness 200% of beam flange
14	Column flanges 75% of Model 1
15	Column flanges 150% of Model 1

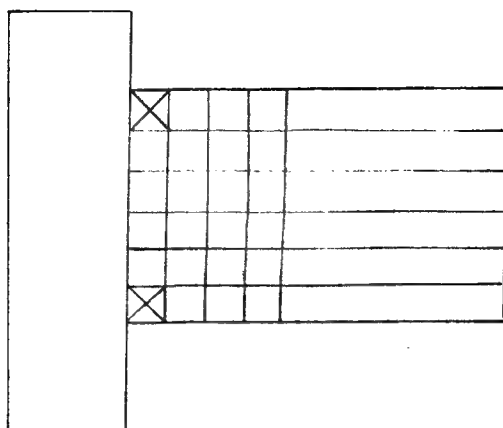


Model 2

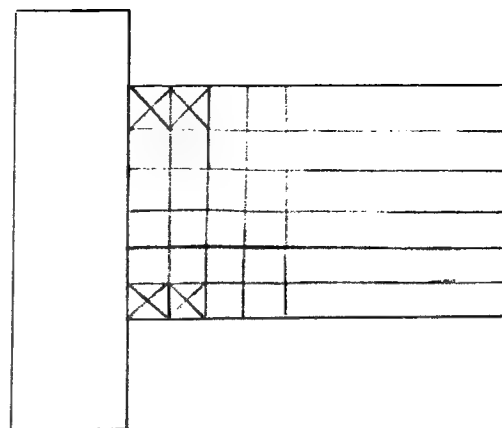


Model 3

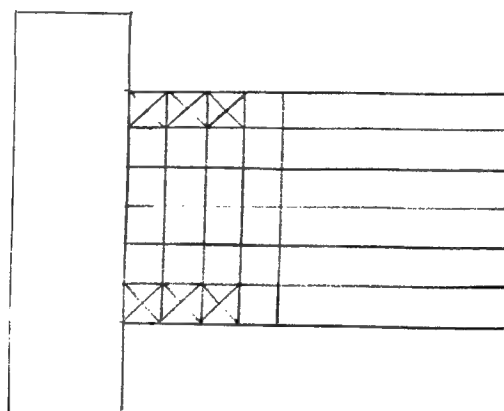

Model 10

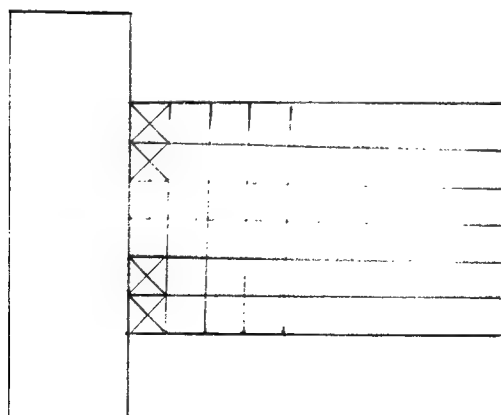

Model 11

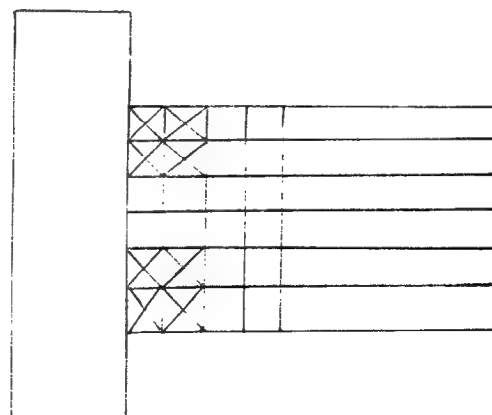

Model 12

Figure 8. Cope Models

Chapter 4: Results of the SAP90 Computer Analysis

4.1 General Discussion

When the stress output option is chosen in a SAP90 analysis, the output for shell elements is given in the form of top and bottom stresses. "Top" and "bottom" are defined by the assignment of global axes and shell thickness.

Plate bending behavior dominates at the extreme fiber of the beam flange and becomes less pronounced as one moves along the beam flange away from the joint. In an effort to normalize the results so that a comparison of beam stress concentrations was possible regardless of relative position from the groove weld, the top and bottom stresses at all element joints were averaged.

SAP90 stress output yields both maximum and minimum principal stresses, shear stresses, and normal stresses oriented along the longitudinal and transverse axes of the beam. The normal stress oriented along the longitudinal axis of the beam best illustrates the variations in stress along the beam flange and is denoted as the S11 stress. These S11 stress results were averaged as discussed in the previous paragraph and the results entered into a spreadsheet as shown in Table 2.

Four positions of interest were chosen to analyze any change in S11 stress concentrations along the beam flange as the distance from the joint was increased. The first was at a position with an x coordinate equal to 12.16". This location corresponds to the point of contact between the beam and column webs, the

location of the full-penetration groove weld. The three remaining positions were located at $X = 13.66''$, $15.16''$, and $20.16''$. These represent distances from the point of flange contact equal to $1.5''$, $3.0''$, and $8.0''$ respectively. The expected stress was calculated at each of these four points of interest by use of the following equation: Expected stress = $(S_x + V_b(e))/S_x$ where S_x = Elastic section modulus of the beam, V_b = Beam shear, and e = Eccentricity from the beam end. This expected stress was then plotted as a horizontal, dotted line on each stress graph.

Displacement data was also tabulated in the longitudinal axis direction of the beam (X direction) at the same four positions. No averaging was necessary since this output data is given in terms of global displacements at the joint rather than at the top and bottom of the shell element. The displacement results for Model 1 are shown in Table 3.

Figure 9 illustrates the deformed shape for Model 1. Since this was a static analysis, all models exhibited the same relative deformed shape; that is, top flange in compression and bottom flange in tension.

4.2 Column Stiffener Models

Models 8, 9, and 13 were created to investigate the effect on the beam flange stress distribution when column web stiffeners are added. As mentioned previously, Model 1 was created as the reference point for all models and

therefore, it had no stiffeners. Model 8 used stiffeners with thicknesses equal to half the thickness of the beam flange. The stiffeners used in Model 9 were equal in thickness to the beam flange while Model 13 stiffeners had thicknesses equal to twice the thickness of the beam flange.

Figure 10 illustrates the bottom flange stress distribution results of the stiffener models along with the results of Model 1. All models are identical except for the variation in stiffener thickness. The key shows the progression of models from no stiffeners present (Model 1) to thickest stiffener (Model 13). The X axis of the plot gives the relative location along the width of the beam flange. Location 6 is at the beam flange midpoint while positions 1 and 11 are at the edges. The general trends among the individual models are as one would expect with the highest stress being at the middle of the flange. The stresses decreased as distance from the midpoint increased. In Models 8, 9, and 13, the stress increases towards the edge of the flange while in Model 1 this stress increase at the edges is not present. This is due to the fact that the column web stiffeners extend all the way to the edge of the column flange instead of stopping at the edge of the beam flange. Model 1 had no stiffeners, so this trend was not present. General trends when models are compared to one another show that thicker stiffeners result in lower stress concentrations around the center of the beam flange. Specifically, at

location 6 the stress in Model 8 is 17% less than that in Model 1, while stresses in Models 9 and 13 are lower than Model 1 by 33% and 37% respectively.

Figure 11 shows the stress distributions at a point 1.5" inches away from the point of contact between the beam and column flanges. The same trends as previously discussed are present with the exception that the stress increases at the outside edges of the beam flange have disappeared. This is easily explained by the fact that the position of interest is no longer immediately adjacent to the column stiffeners, and the stress risers found previously have now been dissipated by the additional beam flange material. A trend that is present in Figure 10 but is more pronounced in Figure 11 is that increased stiffener thickness resulted in a more uniform stress distribution. These results make sense because one of the more attractive results of using a web stiffener is that the stress is more evenly distributed over a given area.

The trends previously discussed are also present in Figure 12 but are not as pronounced since the location is now at a point 3" from the point of contact. Similarly the location which is 8" from the point of contact yields no new results or trends.

Figures 13 and 14 are the beam top flange counterparts to Figures 10 and 11 which illustrate beam bottom flange stress distributions. The trends are identical

to those previously discussed and the symmetry between top and bottom flanges is excellent. Top and bottom flange stress values differ by no more than 3%.

The displacement data was not the focus or interest of this study but rather was used as an indicator of correct model behavior in a global sense. Deflections did not exceed .000482" at the groove weld and graphical trends were similar to those described for the stress distributions. That is, the increased stiffener size resulted in lower, more uniform deflection distributions. Additionally, the deflections were greatest in the center of the beam flange and decreased as distance from the flange center increased.

4.3 Column Flange Models

Models 4, 5, 14, and 15 were created to investigate the effect on the beam flange stress distribution when column flange thickness was varied. As before, Model 1 was created as the reference point for all models and therefore, all column flange thicknesses are referenced to Model 1. Model 4 had a column flange thickness equal to 50% that of Model 1 while Models 5, 14, and 15 had respective column flange thicknesses equal to 200%, 75%, and 150% that of Model 1.

Stress and displacement data were recorded, tabulated and displayed in the same manner as described in Section 4.1. The displacement data was again used as

a global check and, in this series of models, did not exceed .00052". Displacement trends were similar to those described for deflections in Section 4.2.

Figure 15 illustrates the stress distribution results of the column flange models along with the results of Model 1. All models are identical except for the variation in column flange thickness. The key shows the progression of models from thin flange (Model 4) to thick flange (Model 5). The trends among the individual models are the same as noted and explained in section 4.2 with these noted exceptions. The stress increase towards the flange edges was still present but not as pronounced. Only models which had flanges thicker than Model 1 (Models 15 and 5) exhibited this behavior. This is consistent with the results in the column stiffener models.

General trends when models are compared to one another show that the stiffer the model the lower the stress concentration around the center of the beam flange. Specifically, at location 6, the stress in Model 14 is 21% less than that in Model 4 while stresses in Models 1, 15, and 5 are lower than Model 4 by 40%, 44%, and 48% respectively.

Figure 16 shows the stress distributions at a point 1.5" inches away from the point of contact between the beam and column flanges. The same trends as

previously discussed in section 4.1 for this location as well as those which are 3" and 8" from the point of contact are present with no exceptions.

Figures 17 and 18 are the beam top flange counterparts to Figures 15 and 16 which illustrate beam bottom flange stress distributions. As with the column stiffener models, the symmetry between top and bottom flanges is very good. Differences between top and bottom flange stresses differed by no more than 5%.

4.4 Beam Cope Models

Models 2, 3, 10, 11, and 12 were developed to determine if the size of the cope had an effect on the beam flange stress distribution. Again, Model 1 was created as the reference point for all models and therefore, all coped models are referenced to Model 1. Model 1 had no cope, it had only the constant 1/2" gap between the beam web and column flange. Model 2 had one shell element removed at the bottom beam web corner and one shell element removed at the top to model the cope holes. Figure 8, found in chapter 3, shows the elements removed in Models 2, 3, 10, 11, and 12 to model various cope configurations.

Stress and displacement data were recorded, tabulated and displayed in the same manner as with previous models. Again, the displacement data was used as a global check and, in this series of models, did not exceed .00026" which was

lowest of all model groups thus far. Displacement trends were similar to those described in previous sections and thus helped to validate model behavior.

Models 11 and 12 were grouped together since they modeled cope configurations in which not one but two rows of cope elements were deleted. Figure 19 illustrates the stress distribution results of these two cope models along with the results of Model 1. No new trends or variations in data were noted. Stress comparisons at location 6 showed that the stress in Model 11 is 13% less than that in Model 1 and the stress Model 12 is less than that in Model 1 by 19%. These comparisons with Model 1 show differences which are quite small relative to column stiffener models and column flange models which resulted in differences from Model 1 as large as 37% and 48% respectively. The small differences noted in Models 11 and 12 are compounded by the fact that this type of a cope configuration represents cope dimensions which are 30% larger than typical for this size beam. As with previous models, the stress differences at the center of the beam flange became less pronounced as distance from the point of contact increased. Symmetry between top and bottom flanges was excellent. Differences between top and bottom flange stress values differed by no more than 2%.

Models 2, 3, and 10 were grouped together since they modeled cope configurations in which only one row of cope elements were deleted. Stress

comparisons at location 6 showed results that differed from Model 1 by no more than 8%. Stress distribution results revealed no new trends or variations in data. Symmetry between top and bottom flanges was excellent. Differences between top and bottom flange stress values differed by no more than 1%.

4.5 Column Web Models

Models 6 and 7 were used to check for changes in beam flange stress distributions caused by variation in column web thickness. Model 6 had a column web thickness equal to 50% that of the Model 1 column web thickness while the Model 7 thickness was 200% that of Model 1.

Stress and displacement data were recorded, tabulated and displayed in the same manner as with previous models. Displacement data again provided a global check of the models and deflections did not exceed .00021".

Flange stress distribution results of Models 6 and 7 never differed from those of Model 1 at any location by more than 5%. Symmetry between top and bottom flanges is again excellent with differences between top and bottom flange stress values of no more than 2%.

Table 2. Stress Results: Model 1

				Bottom Flange		
Joint	S11	Joint	S11	Joint	S11	Joint
	(ksi)		(ksi)		(ksi)	
153	0.76995	4.13E+2	7.85E-1	4.46E+2	9.40E-1	6.61E+2
154	0.96674	4.14E+2	1.11E+0	4.47E+2	1.11E+0	6.62E+2
155	1.2943	4.15E+2	1.30E+0	4.48E+2	1.27E+0	6.63E+2
156	1.72	4.16E+2	1.64E+0	4.49E+2	1.44E+0	6.64E+2
157	2.614	4.17E+2	1.96E+0	4.50E+2	1.50E+0	6.65E+2
158	4.31	4.18E+2	2.07E+0	4.51E+2	1.46E+0	6.66E+2
159	2.242	4.19E+2	1.98E+0	4.52E+2	1.53E+0	6.67E+2
160	1.78	4.20E+2	1.69E+0	4.53E+2	1.47E+0	6.68E+2
161	1.3249	4.21E+2	1.44E+0	4.54E+2	1.36E+0	6.69E+2
162	1.0536	4.22E+2	1.17E+0	4.55E+2	1.24E+0	6.70E+2
163	0.91341	4.23E+2	7.60E-1	4.56E+2	1.16E+0	6.71E+2
				Top Flange		
Joint	S11	Joint	S11	Joint	S11	Joint
	(ksi)		(ksi)		(ksi)	
267	-0.75	5.23E+2	-7.82E-1	5.56E+2	-9.30E-1	7.71E+2
268	-0.92	5.24E+2	-1.05E+0	5.57E+2	-1.10E+0	7.72E+2
269	-1.25	5.25E+2	-1.21E+0	5.58E+2	-1.25E+0	7.73E+2
270	-1.7	5.26E+2	-1.60E+0	5.59E+2	-1.40E+0	7.74E+2
271	-2.63	5.27E+2	-1.90E+0	5.60E+2	-1.52E+0	7.75E+2
272	-4.37	5.28E+2	-2.01E+0	5.61E+2	-1.45E+0	7.76E+2
273	-2.2	5.29E+2	-1.93E+0	5.62E+2	-1.52E+0	7.77E+2
274	-1.7	5.30E+2	-1.67E+0	5.63E+2	-1.45E+0	7.78E+2
275	-1.3	5.31E+2	-1.40E+0	5.64E+2	-1.32E+0	7.79E+2
276	-1.1	5.32E+2	-1.10E+0	5.65E+2	-1.22E+0	7.80E+2
277	-0.9	5.33E+2	-7.50E-1	5.66E+2	-1.15E+0	7.81E+2

Table 3. Displacement Results: Model 1

				Bottom Flange		
Joint	"X" Disp. (in.)	Joint	"X" Disp. (in.)	Joint	"X" Disp. (in.)	Joint
153	-0.000316	4.13E+2	-2.88E-4	4.46E+2	-2.51E-4	6.61E+2
154	-0.000381	4.14E+2	-3.06E-4	4.47E+2	-2.57E-4	6.62E+2
155	-0.000381	4.15E+2	-3.27E-4	4.48E+2	-2.65E-4	6.63E+2
155	-0.000419	4.16E+2	-3.47E-4	4.49E+2	-2.74E-4	6.64E+2
157	-0.000459	4.17E+2	-3.60E-4	4.50E+2	-2.78E-4	6.65E+2
158	-0.000482	4.18E+2	-3.61E-4	4.51E+2	-2.79E-4	6.66E+2
159	-0.000467	4.19E+2	-3.68E-4	4.52E+2	-2.86E-4	6.67E+2
160	-0.000439	4.20E+2	-3.65E-4	4.53E+2	-2.89E-4	6.68E+2
161	-0.000411	4.21E+2	-3.54E-4	4.54E+2	-2.89E-4	6.69E+2
162	-0.000388	4.22E+2	-3.42E-4	4.55E+2	-2.88E-4	6.70E+2
163	-0.000368	4.23E+2	-3.33E-4	4.56E+2	-2.90E-4	6.71E+2
				Top Flange		
Joint	"X" Disp. (in.)	Joint	"X" Disp. (in.)	Joint	"X" Disp. (in.)	Joint
267	0.000329	5.23E+2	3.02E-4	5.56E+2	2.62E-4	7.71E+2
268	0.000355	5.24E+2	3.14E-4	5.57E+2	2.65E-4	7.72E+2
269	0.000385	5.25E+2	3.30E-4	5.58E+2	2.71E-4	7.73E+2
270	0.00042	5.26E+2	3.47E-4	5.59E+2	2.77E-4	7.74E+2
271	0.000458	5.27E+2	3.59E-4	5.60E+2	2.79E-4	7.75E+2
272	0.00048	5.28E+2	3.60E-4	5.61E+2	2.77E-4	7.76E+2
273	0.000466	5.29E+2	3.67E-4	5.62E+2	2.87E-4	7.77E+2
274	0.00044	5.30E+2	3.65E-4	5.63E+2	2.92E-4	7.78E+2
275	0.000415	5.31E+2	3.57E-4	5.64E+2	2.94E-4	7.79E+2
276	0.000395	5.32E+2	3.49E-4	5.65E+2	2.96E-4	7.80E+2
277	0.000378	5.33E+2	3.46E-4	5.66E+2	3.00E-4	7.81E+2

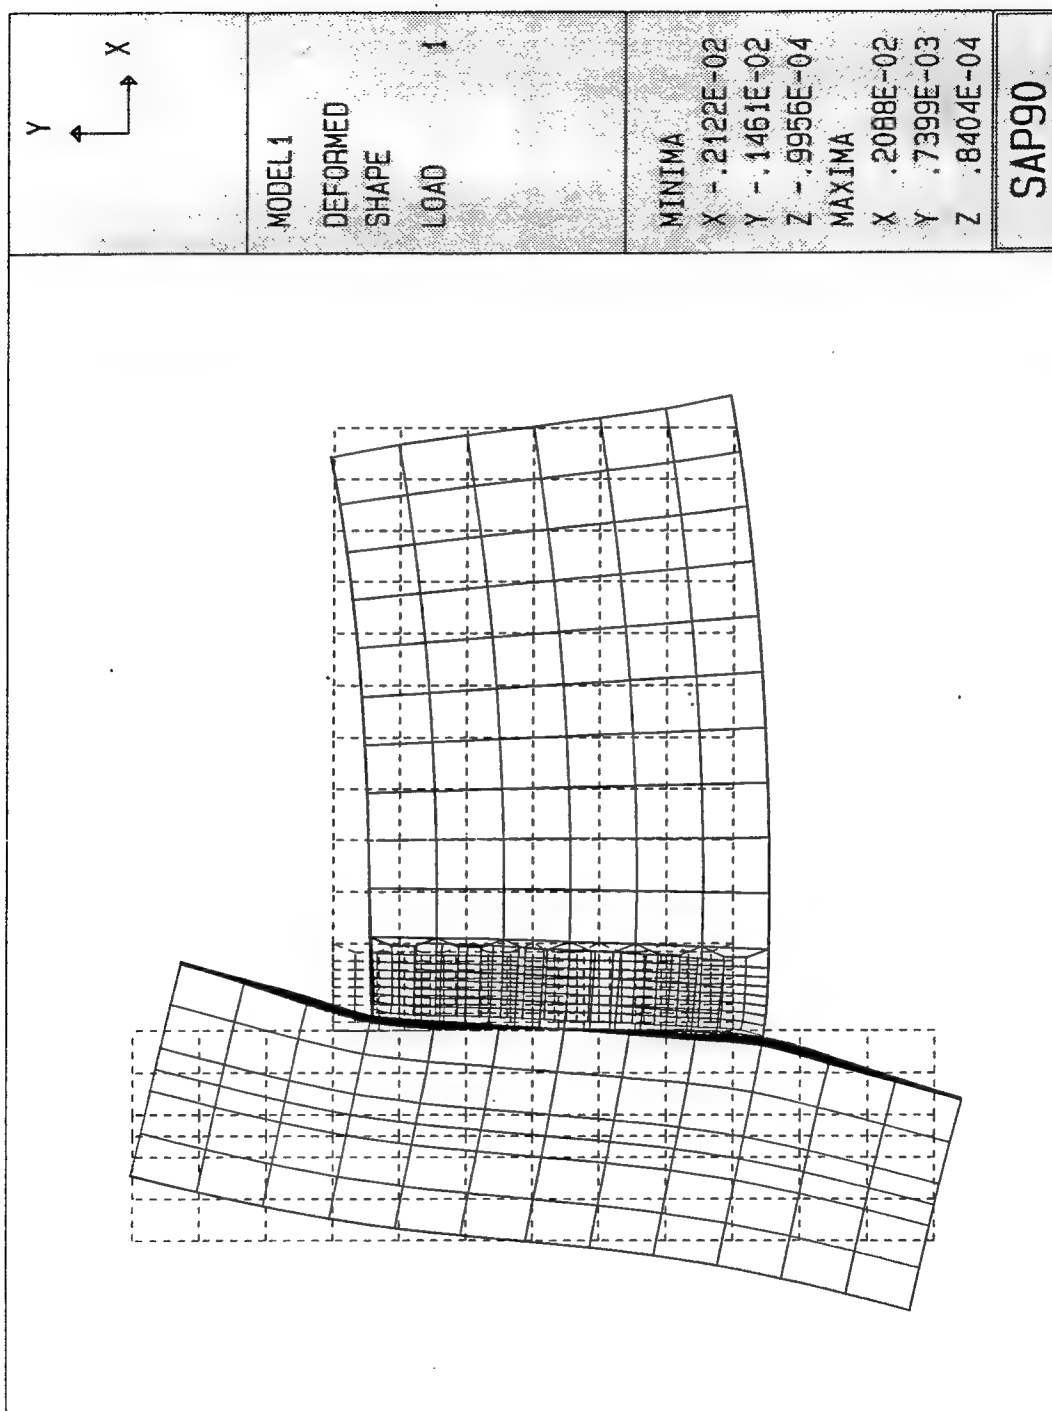


Figure 9. Deformed Shape: Model 1

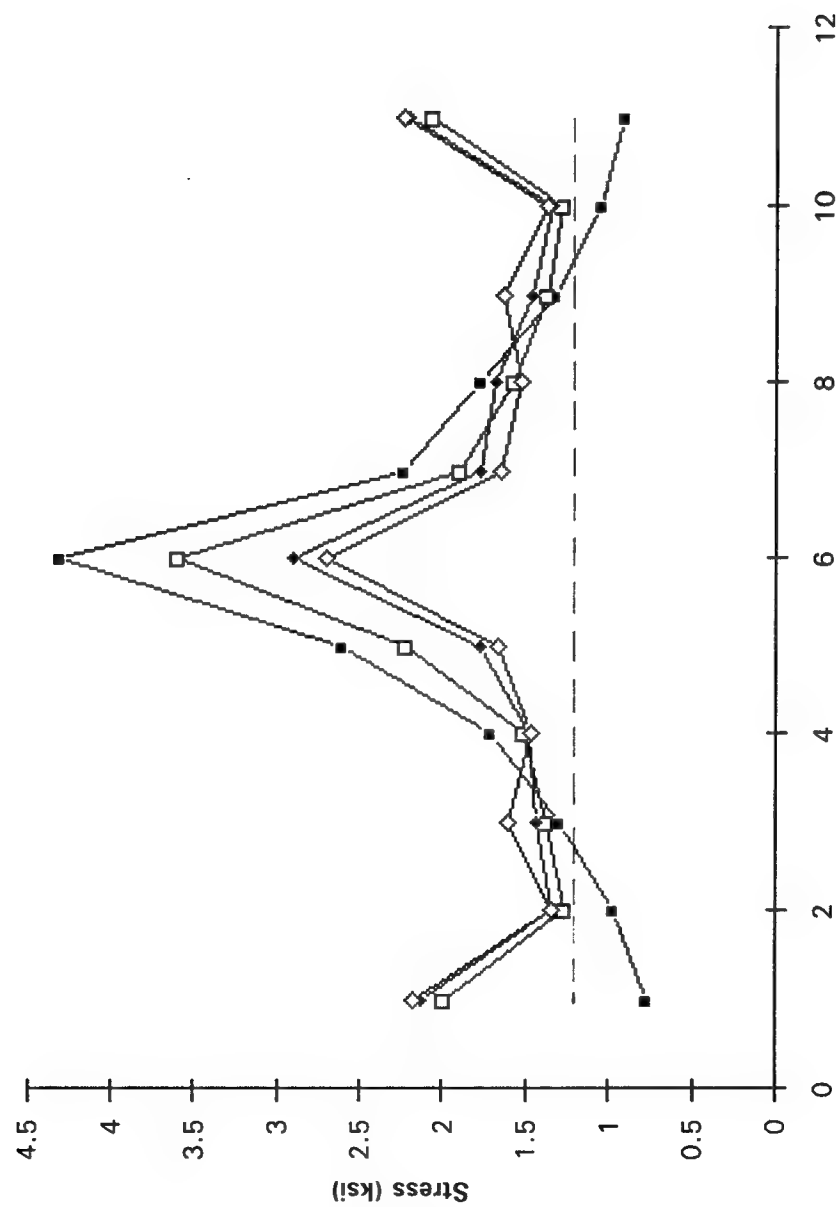


Figure 10. Stiffener Models: Bottom Flange Stress Results at Groove Weld

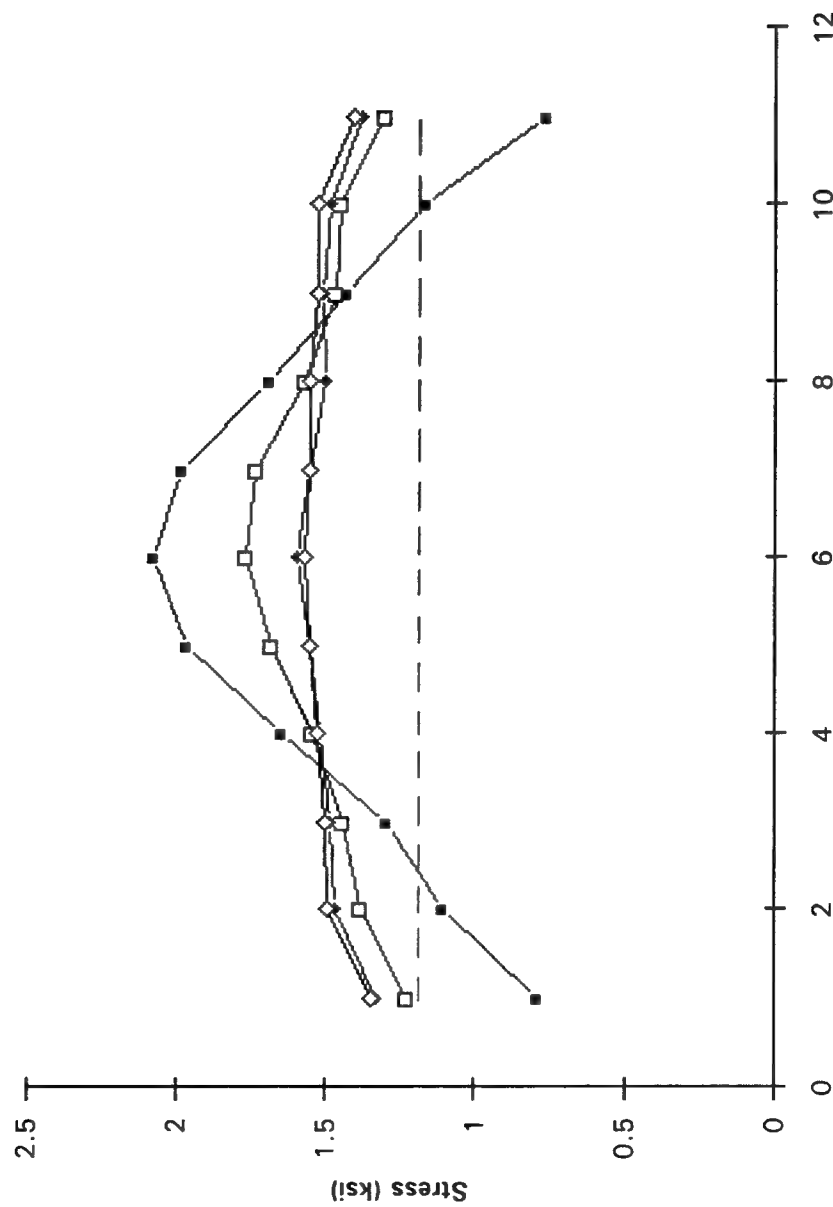


Figure 11. Stiffener Models: Bottom Flange Stress Results at 1.5" from Groove Weld

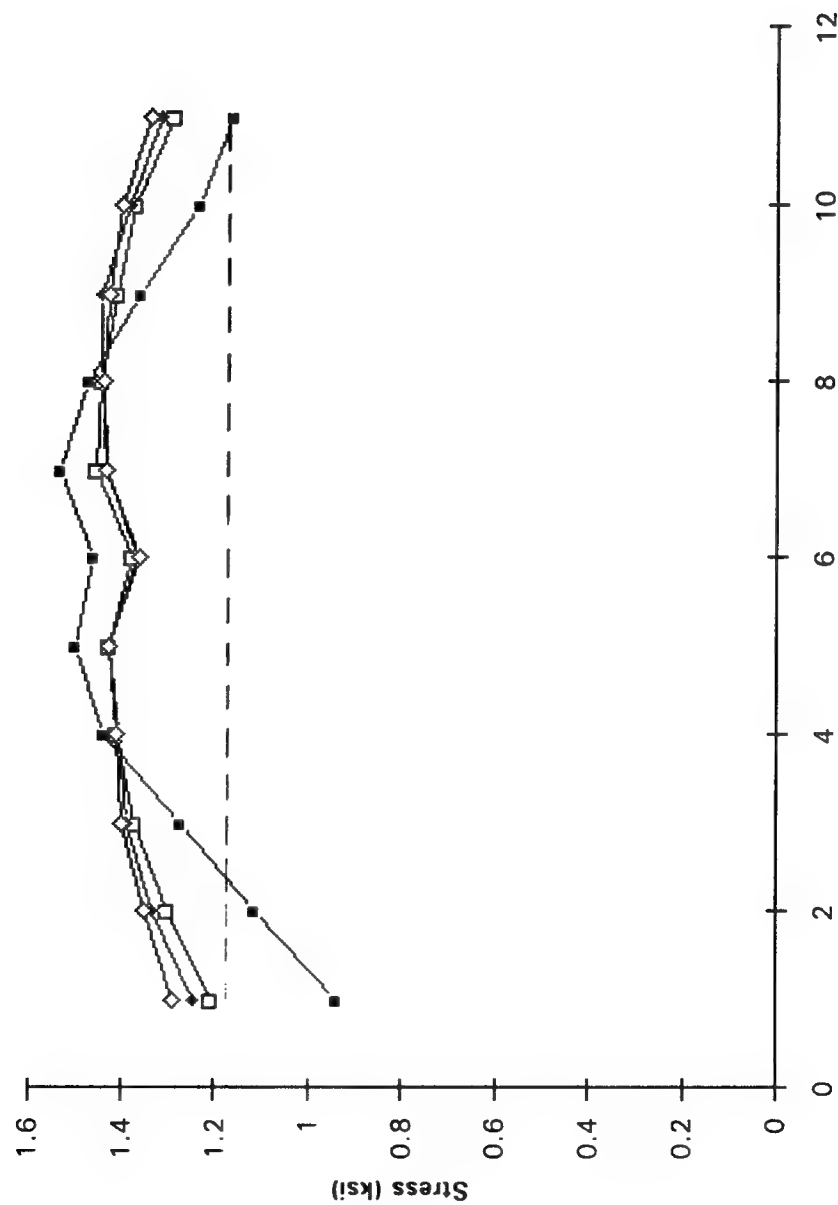


Figure 12. Stiffener Models: Bottom Flange Stress Results at 3" from Groove Weld

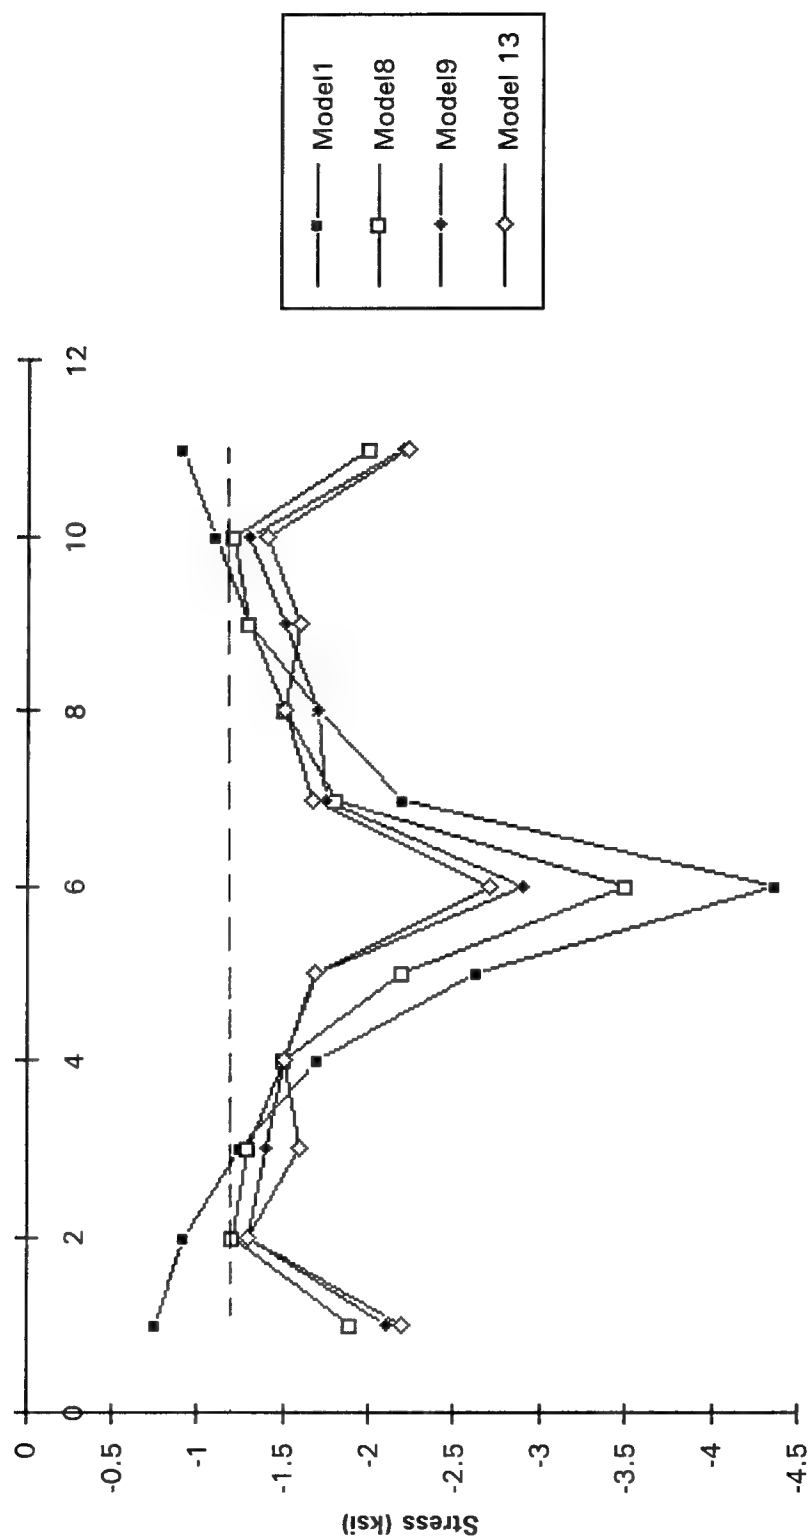


Figure 13. Stiffener Models: Top Flange Stress Results at Groove Weld

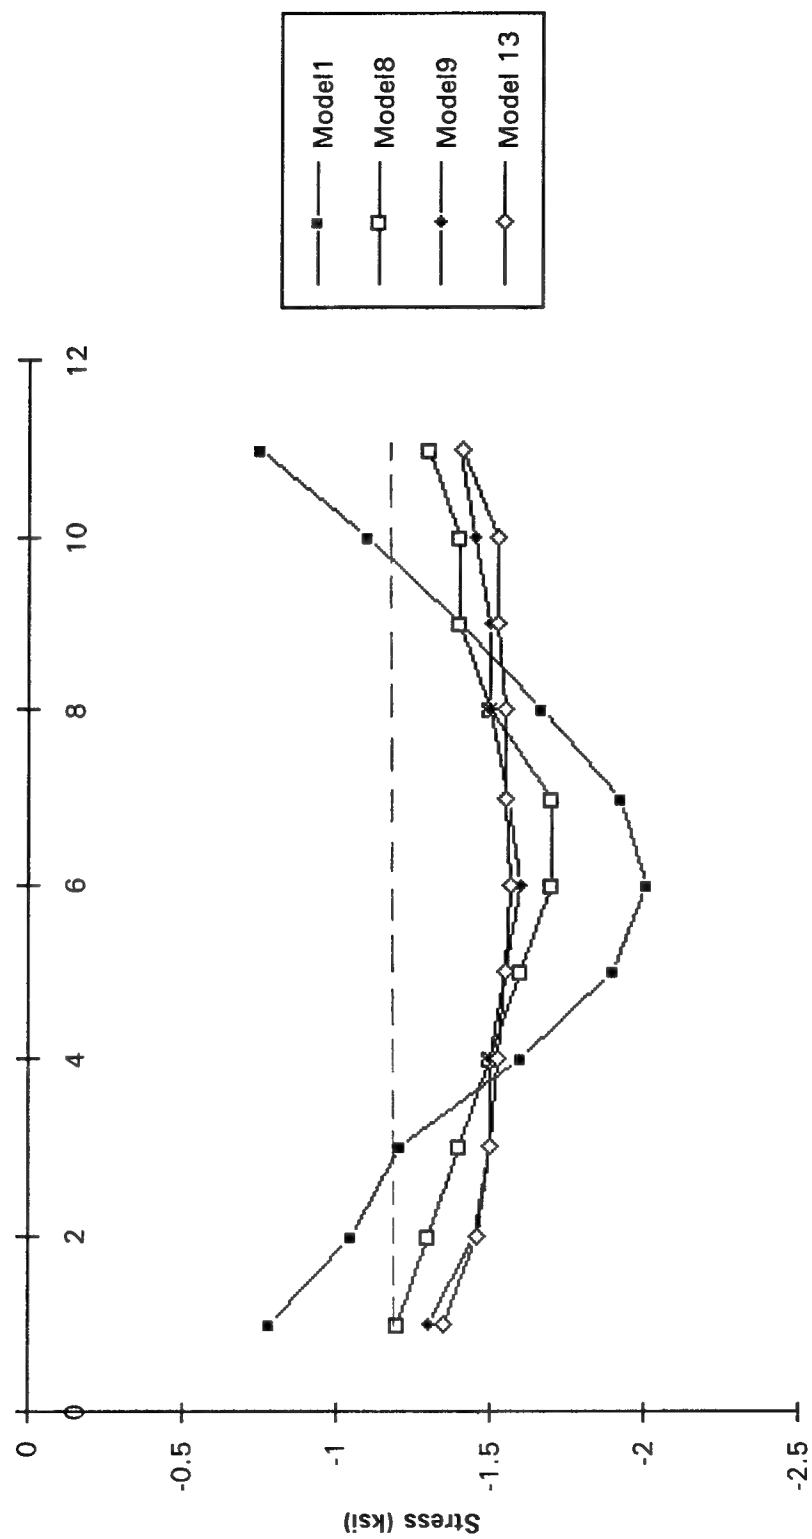


Figure 14. Stiffener Models: Top Flange Stress Results at 1.5" from Groove Weld

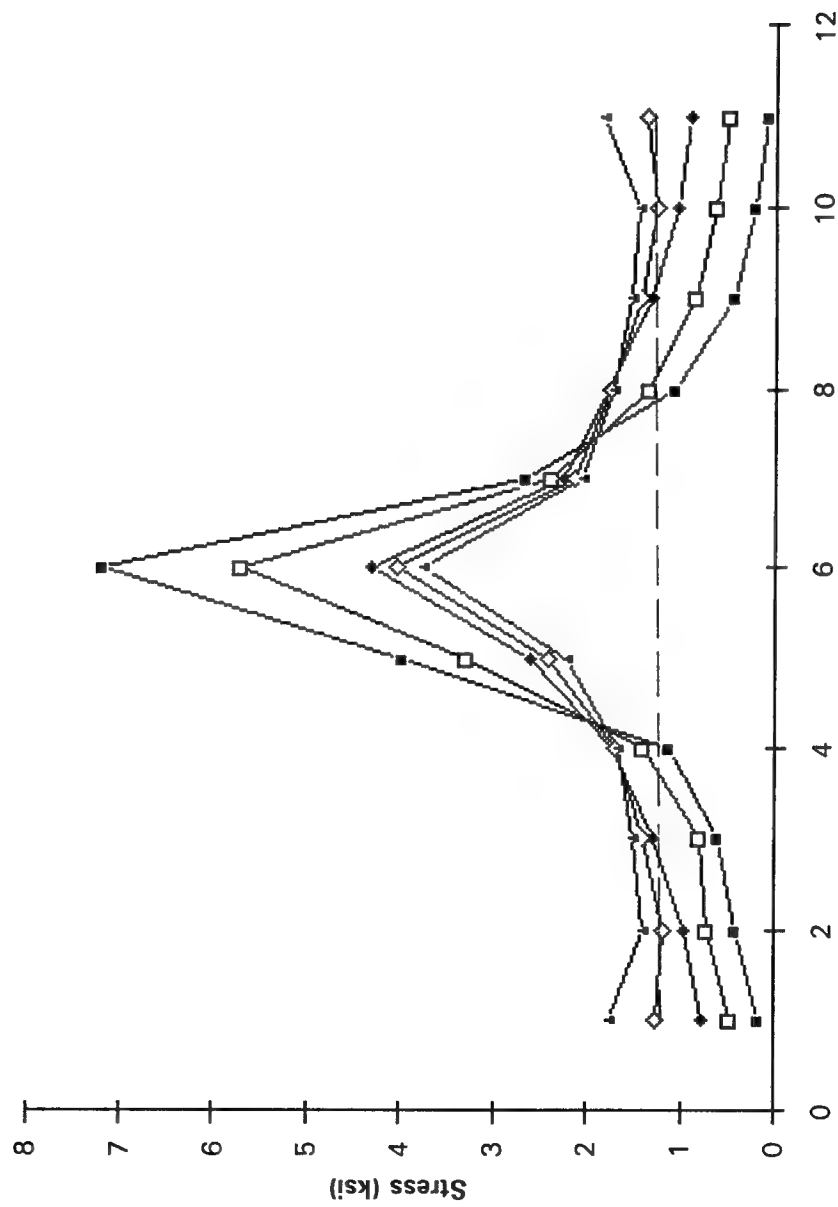


Figure 15. Column Flange Models: Bottom Flange Stress Results at Groove Weld

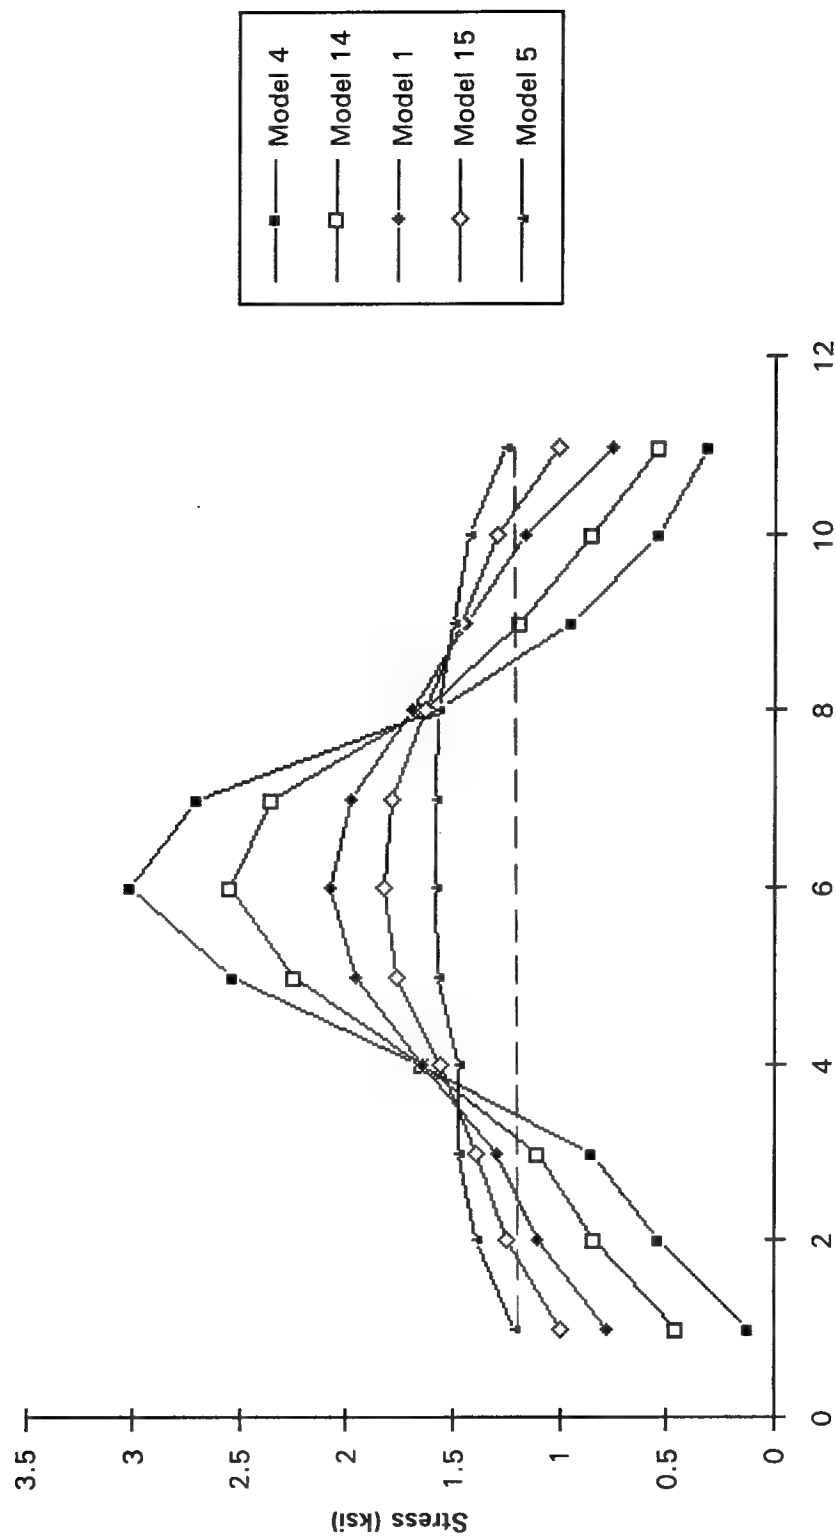


Figure 16. Column Flange Models: Bottom Flange Stress Results at 1.5" from Groove Weld

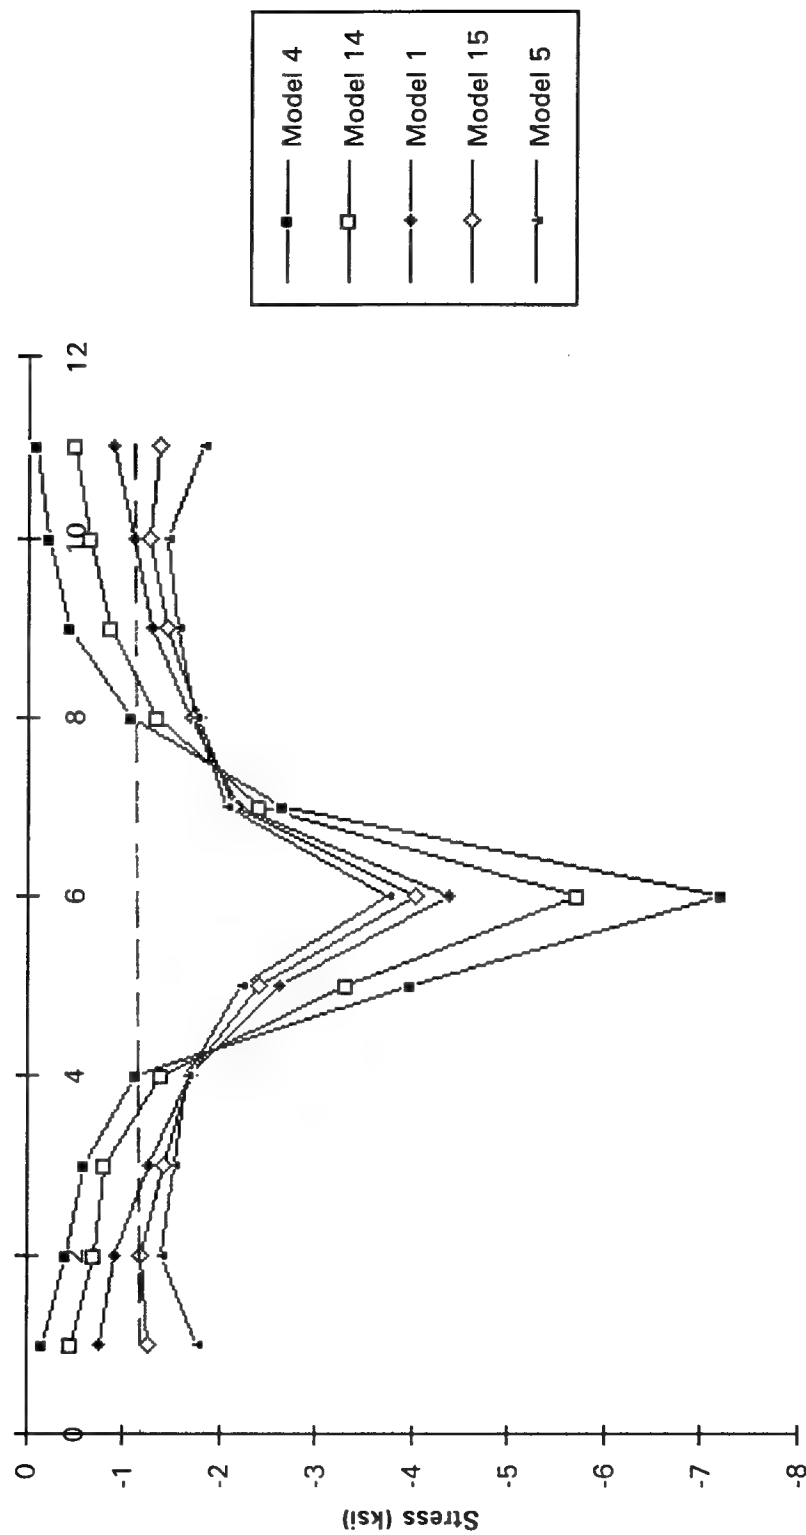


Figure 17. Column Flange Models: Top Flange Stress Results at Groove Weld


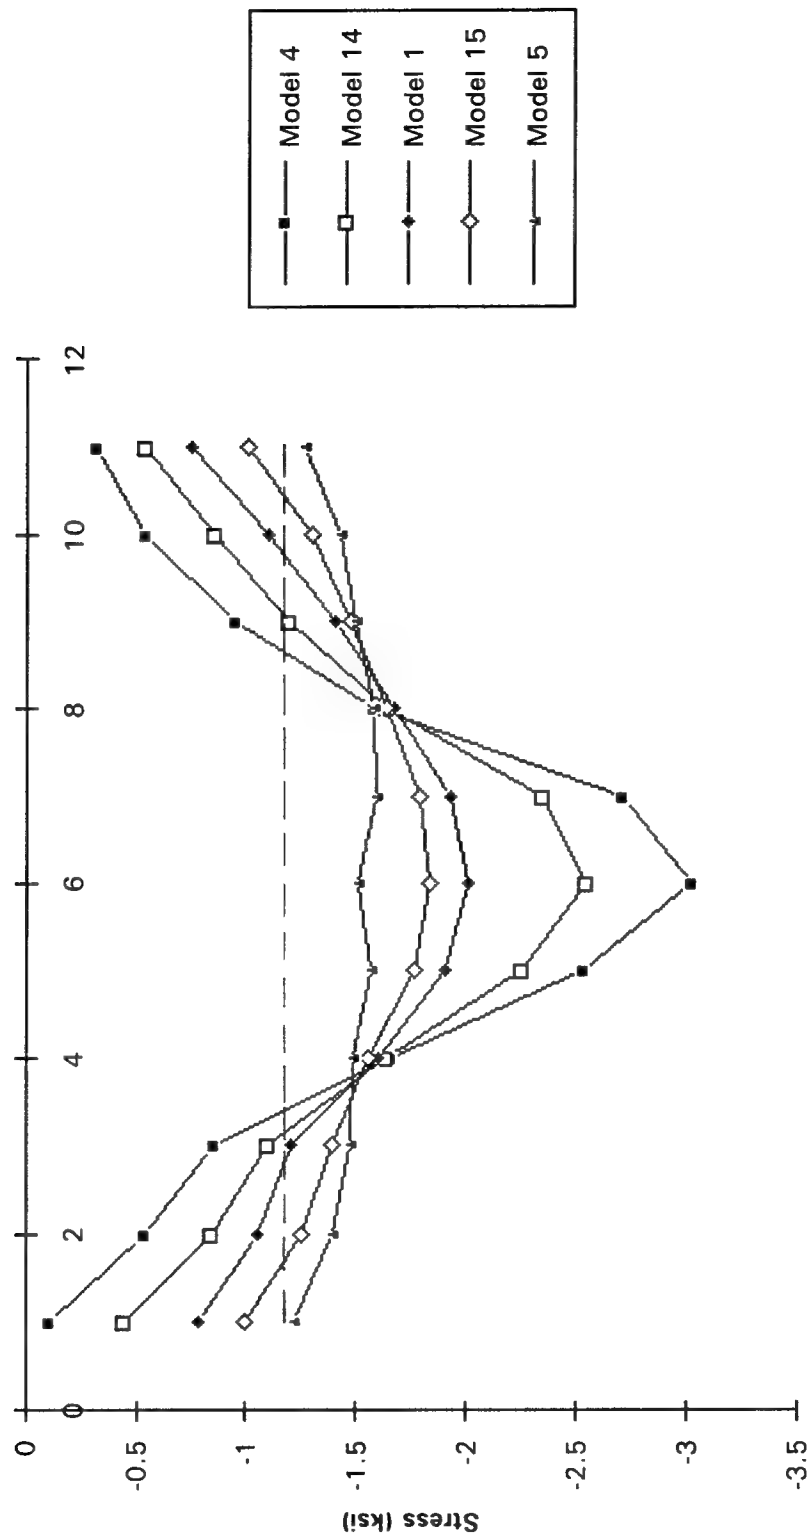


Figure 18. Column Flange Models: Top Flange Stress Results at 1.5" from Groove Weld

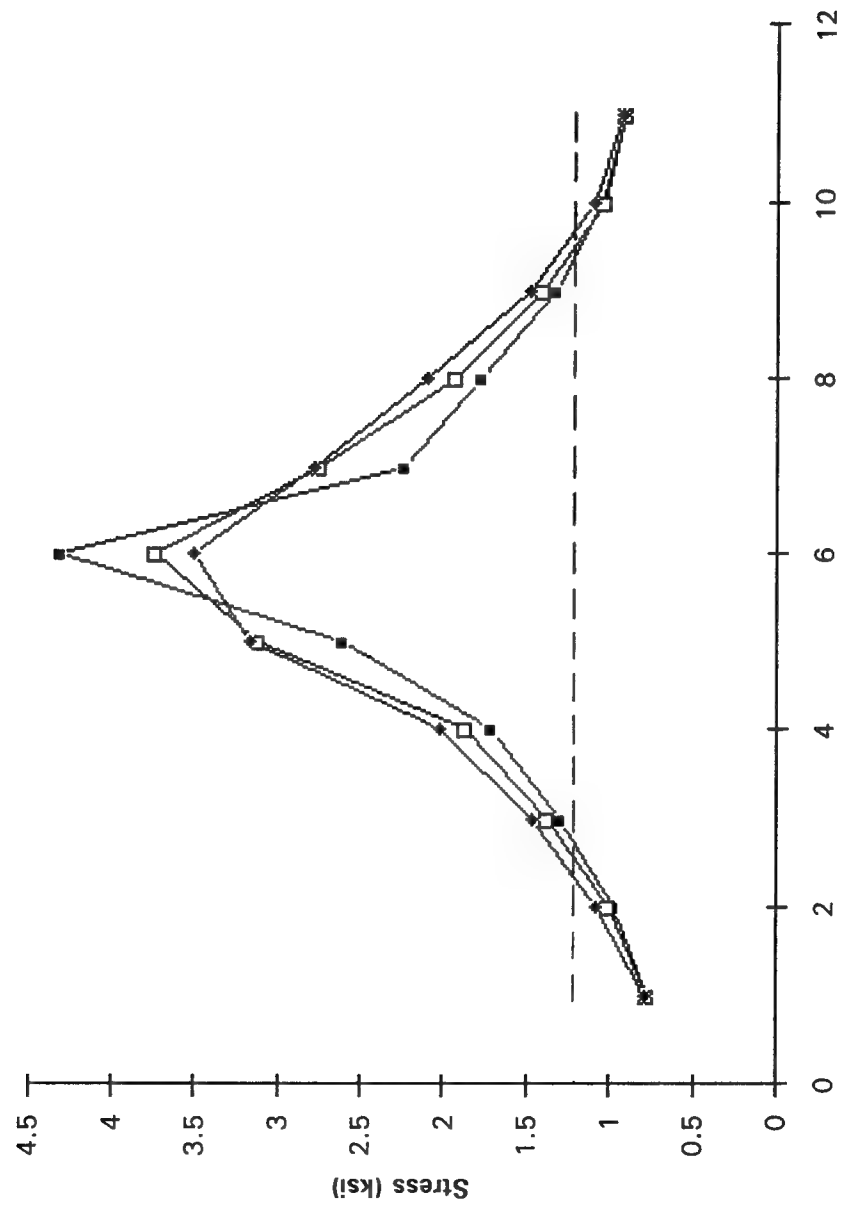

Model 1
Model 11
Model 12

Figure 19. Beam Cope Models: Bottom Flange Stress Results at Groove Weld

Chapter 5: Summary and Conclusions

Fifteen SAP90 computer models were developed and tested in this study to facilitate investigation into the effect of various joint parameters on the stress distribution of a welded flange-bolted web connection. Parameters varied within these models were the column stiffener thickness, column flange thickness, column web thickness, and beam cope size.

Column stiffener thickness was found to have a significant effect on the stress concentration at the interface of the beam and column flanges. In models with stiffener thickness equal to that of the beam flange, stresses were found to be 33% less than the original model where no stiffeners were used.

Column flange thickness was found to have the most pronounced effect on stress concentrations. Models with flange thicknesses 25% less than the original model were found to have stress concentrations 19% higher than the original model. However, a flange thickness 50% greater than the original resulted in a stress drop of only 4%.

Column web thickness was found to have very little effect on the stress concentration. One should remember that the stresses under investigation were stresses normal to the plane of the column flange. It has been shown that web thickness has a significant effect on the shear stresses found in the panel zone [1].

Size and geometry of the beam cope was found to have a relatively small impact on the stress concentrations. However, it has been shown that variability in the preparation and execution of the full penetration groove welds, which includes preparation of the beam copes, has a significant impact on overall joint performance [10]. Furthermore, welder experience and proficiency as well as construction site conditions and practices are highly variable and their impact is not fully realized nor can it readily be accounted for by structural engineers.

Symmetry of top and bottom flange results verified in yet another way, the accuracy and appropriateness of the model but it was not possible to correctly account for the restraint provided by the concrete floor slab. For this reason as well as the previous discussion of groove weld variability, experimental investigation is necessary to further illustrate these flange stress concentrations.

Bibliography

1. Krawinkler, H., Bertero, V.V., and Popov, E.P., "Inelastic Behavior of Steel Beam-to-Column Subassemblages," *Earthquake Engineering Research Center Report No. EERC 71-7*, University of California, Berkeley, Calif., October, 1971.
2. Johnson, L.G., "Tests on Welded Connections between I-Section Beams and Stanchions," *British Welding Journal*, Vol. 6, January 1959.
3. Technology and Research Department of AISC, "Earthquake Design," *Modern Steel Construction*, Vol. 34, No. 4, April 1994.
4. Bertero, V.V., Krawinkler, H., and Popov, E.P., "Further Studies on Seismic Behavior of Steel Beam-Column Subassemblages," *Earthquake Engineering Research Center Report No. EERC 73-27*, University of California, Berkeley, Calif., December 1973.
5. Tsai, K.C., and Popov, E.P., "Steel Beam-Column Joints in Seismic Moment Resisting Frames," *Earthquake Engineering Research Center Report No. UCB/EERC-88/19*, University of California, Berkeley, Calif., November 1988.
6. *Recommended lateral force requirements and commentary*. (1990). Structural Engineers Association of California, Sacramento, Calif.
7. *NEHRP recommended provisions for the development of seismic regulations for new buildings*. (1991). Building Seismic Safety Council, Federal Emergency Management Agency (FEMA), Washington, D.C.
8. *Seismic provisions for structural steel buildings*. (1992). American Institute of Steel Construction (AISC), Chicago, Ill.

9. *Uniform building code*. (1991). International Conference of Building Officials, Whittier, Calif.
10. Engelhardt, M.D., and Hussain A.S., "Cyclic-Loading Performance of Welded-Flange Bolted Web Connections," *Journal of Structural Engineering*, ASCE, Vol. 119, No. 12, December, 1993.
11. Popov, E.P., Amin, N.R., Louie, J., and Stephen, R.M., "Cyclic Behavior of Large Beam-Column Assemblies," *American Institute of Steel Construction Engineering Journal*, Vol. 23, No. 1, 1st Quarter, 1986.
12. Wilson, E.L., and Habibullah, A., "SAP90 -- A Series of Computer Programs for the Finite Element Analysis of Structures," Structural Analysis Users Manual, Computers and Structures, Inc., Berkeley, Calif., May 1992.
13. *Structural welding code -- steel*. (1992). American Welding Society, Miami, Fla.

Appendix A: SAP90 Input File for Model 1

MODEL 1 - WELDED FLANGE BOLTED WEB MOMENT RESISTING CONNECTION

C This is file MODEL1 written by SAPIN on Wed Nov 16 09:52:43 1994

C Units are KIP INCHES

SYSTEM

R=0 L=1 C=0 V=0 T=0.0001 P=0 W=0 Z=0

GRID

XN=1 YN=2 ZN=2

12.16

0 46.13

0 0.4535

JOINTS

7 X=0 Y=0 Z=-6.2

85 X=0 Y=46.13 Z=6.2

91 X=0 Y=46.13 Z=-6.2

1 X=0 Y=0 Z=6.2 Q=1,7,85,91,1,7

110 X=12.16 Y=0 Z=-6.2

320 X=12.16 Y=46.13 Z=6.2

338 X=12.16 Y=46.13 Z=-6.2

92 X=12.16 Y=0 Z=6.2 Q=92,110,320,338,1,19

342 X=9.728 Y=0 Z=0

387 X=2.432 Y=46.13 Z=0

390 X=9.728 Y=46.13 Z=0

339 X=2.432 Y=0 Z=0 Q=339,342,387,390,1,4

401 X=12.66 Y=11.533 Z=-3.503

490 X=17.16 Y=11.533 Z=3.503

500 X=17.16 Y=11.533 Z=-3.503

391 X=12.66 Y=11.533 Z=3.503 Q=391,401,490,500,1,11

511 X=12.66 Y=34.598 Z=-3.503

600 X=17.16 Y=34.598 Z=3.503

610 X=17.16 Y=34.598 Z=-3.503

501 X=12.66 Y=34.598 Z=3.503 Q=501,511,600,610,1,11

620 X=17.16 Y=15.377 Z=0

651 X=12.66 Y=30.753 Z=0

660 X=17.16 Y=30.753 Z=0

611 X=12.66 Y=15.377 Z=0 Q=611,620,651,660,1,10
671 X=20.16 Y=11.533 Z=-3.503
760 X=47.16 Y=11.533 Z=3.503
770 X=47.16 Y=11.533 Z=-3.503
661 X=20.16 Y=11.533 Z=3.503 Q=661,671,760,770,1,11
781 X=20.16 Y=34.598 Z=-3.503
870 X=47.16 Y=34.598 Z=3.503
880 X=47.16 Y=34.598 Z=-3.503
771 X=20.16 Y=34.598 Z=3.503 Q=771,781,870,880,1,11
890 X=47.16 Y=15.377 Z=0
921 X=20.16 Y=30.753 Z=0
930 X=47.16 Y=30.753 Z=0
881 X=20.16 Y=15.377 Z=0 Q=881,890,921,930,1,10
939 X=16.66 Y=12.81439 Z=0
931 X=12.66 Y=12.81439 Z=0 G=931,939,1,1
940 X=12.66 Y=14.09578 Z=0
949 X=16.66 Y=14.09578 Z=0
950 X=12.66 Y=16.65856 Z=0
960 X=12.66 Y=17.93995 Z=0
961 X=13.16 Y=17.93995 Z=0
962 X=13.66 Y=17.93995 Z=0
963 X=14.16 Y=17.93995 Z=0
964 X=14.66 Y=17.93995 Z=0
965 X=15.16 Y=17.93995 Z=0
966 X=15.66 Y=17.93995 Z=0
967 X=16.16 Y=17.93995 Z=0
968 X=16.66 Y=17.93995 Z=0
969 X=12.66 Y=20.50272 Z=0
970 X=13.16 Y=20.50272 Z=0
971 X=13.66 Y=20.50272 Z=0
972 X=14.16 Y=20.50272 Z=0
973 X=14.66 Y=20.50272 Z=0
974 X=15.16 Y=20.50272 Z=0
975 X=15.66 Y=20.50272 Z=0
976 X=16.16 Y=20.50272 Z=0
977 X=16.66 Y=20.50272 Z=0
978 X=12.66 Y=21.78411 Z=0
979 X=13.16 Y=21.78411 Z=0
980 X=13.66 Y=21.78411 Z=0
981 X=14.16 Y=21.78411 Z=0
982 X=14.66 Y=21.78411 Z=0
983 X=15.16 Y=21.78411 Z=0
984 X=15.66 Y=21.78411 Z=0
985 X=16.16 Y=21.78411 Z=0
986 X=16.66 Y=21.78411 Z=0
987 X=12.66 Y=24.34689 Z=0
988 X=13.16 Y=24.34689 Z=0
989 X=13.66 Y=24.34689 Z=0
990 X=14.16 Y=24.34689 Z=0
991 X=14.66 Y=24.34689 Z=0
992 X=15.16 Y=24.34689 Z=0
993 X=15.66 Y=24.34689 Z=0
994 X=16.16 Y=24.34689 Z=0
995 X=16.66 Y=24.34689 Z=0

996 X=12.66 Y=25.62828 Z=0
997 X=13.16 Y=25.62828 Z=0
998 X=13.66 Y=25.62828 Z=0
999 X=14.16 Y=25.62828 Z=0
1000 X=14.66 Y=25.62828 Z=0
1001 X=15.16 Y=25.62828 Z=0
1002 X=15.66 Y=25.62828 Z=0
1003 X=16.16 Y=25.62828 Z=0
1004 X=16.66 Y=25.62828 Z=0
1005 X=12.66 Y=28.19106 Z=0
1006 X=13.16 Y=28.19106 Z=0
1007 X=13.66 Y=28.19106 Z=0
1008 X=14.16 Y=28.19106 Z=0
1009 X=14.66 Y=28.19106 Z=0
1010 X=15.16 Y=28.19106 Z=0
1011 X=15.66 Y=28.19106 Z=0
1012 X=16.16 Y=28.19106 Z=0
1013 X=16.66 Y=28.19106 Z=0
1014 X=12.66 Y=29.47244 Z=0
1015 X=13.16 Y=29.47244 Z=0
1016 X=13.66 Y=29.47244 Z=0
1017 X=14.16 Y=29.47244 Z=0
1018 X=14.66 Y=29.47244 Z=0
1019 X=15.16 Y=29.47244 Z=0
1020 X=15.66 Y=29.47244 Z=0
1021 X=16.16 Y=29.47244 Z=0
1022 X=16.66 Y=29.47244 Z=0
1023 X=12.66 Y=32.03522 Z=0
1024 X=13.16 Y=32.03522 Z=0
1025 X=13.66 Y=32.03522 Z=0
1026 X=14.16 Y=32.03522 Z=0
1027 X=14.66 Y=32.03522 Z=0
1028 X=15.16 Y=32.03522 Z=0
1029 X=15.66 Y=32.03522 Z=0
1030 X=16.16 Y=32.03522 Z=0
1031 X=16.66 Y=32.03522 Z=0
1032 X=12.66 Y=33.31661 Z=0
1033 X=13.16 Y=33.31661 Z=0
1034 X=13.66 Y=33.31661 Z=0
1035 X=14.16 Y=33.31661 Z=0
1036 X=14.66 Y=33.31661 Z=0
1037 X=15.16 Y=33.31661 Z=0
1038 X=15.66 Y=33.31661 Z=0
1039 X=16.16 Y=33.31661 Z=0
1040 X=16.66 Y=33.31661 Z=0
941 X=13.16 Y=14.09578 Z=0
942 X=13.66 Y=14.09578 Z=0
943 X=14.16 Y=14.09578 Z=0
944 X=14.66 Y=14.09578 Z=0
945 X=15.16 Y=14.09578 Z=0
946 X=15.66 Y=14.09578 Z=0
947 X=16.16 Y=14.09578 Z=0
951 X=13.16 Y=16.65856 Z=0
952 X=13.66 Y=16.65856 Z=0

953 X=14.16 Y=16.65856 Z=0
954 X=14.66 Y=16.65856 Z=0
955 X=15.16 Y=16.65856 Z=0
956 X=15.66 Y=16.65856 Z=0
957 X=16.16 Y=16.65856 Z=0
958 X=16.66 Y=16.65856 Z=0
1041 X=12.16 Y=14.18 Z=0.4535
1042 X=16.688 Y=14.18 Z=0.4535
1043 X=12.16 Y=31.94 Z=0.4535
1044 X=16.688 Y=31.94 Z=0.4535
1045 X=16.688 Y=15.66 Z=0.4535
1046 X=16.688 Y=17.14 Z=0.4535
1047 X=16.688 Y=18.62 Z=0.4535
1048 X=16.688 Y=20.1 Z=0.4535
1049 X=16.688 Y=21.58 Z=0.4535
1050 X=16.688 Y=23.06 Z=0.4535
1051 X=16.688 Y=24.54 Z=0.4535
1052 X=16.688 Y=26.02 Z=0.4535
1053 X=16.688 Y=27.5 Z=0.4535
1054 X=16.688 Y=28.98 Z=0.4535
1055 X=16.688 Y=30.46 Z=0.4535
1056 X=15.17867 Y=15.66 Z=0.4535
1057 X=15.17867 Y=17.14 Z=0.4535
1058 X=15.17867 Y=18.62 Z=0.4535
1059 X=15.17867 Y=20.1 Z=0.4535
1060 X=15.17867 Y=21.58 Z=0.4535
1061 X=15.17867 Y=23.06 Z=0.4535
1062 X=15.17867 Y=24.54 Z=0.4535
1063 X=15.17867 Y=26.02 Z=0.4535
1064 X=15.17867 Y=27.5 Z=0.4535
1065 X=15.17867 Y=28.98 Z=0.4535
1066 X=15.17867 Y=30.46 Z=0.4535
1067 X=13.66933 Y=15.66 Z=0.4535
1068 X=13.66933 Y=17.14 Z=0.4535
1069 X=13.66933 Y=18.62 Z=0.4535
1070 X=13.66933 Y=20.1 Z=0.4535
1071 X=13.66933 Y=21.58 Z=0.4535
1072 X=13.66933 Y=23.06 Z=0.4535
1073 X=13.66933 Y=24.54 Z=0.4535
1074 X=13.66933 Y=26.02 Z=0.4535
1075 X=13.66933 Y=27.5 Z=0.4535
1076 X=13.66933 Y=28.98 Z=0.4535
1077 X=13.66933 Y=30.46 Z=0.4535
1078 X=12.16 Y=15.66 Z=0.4535
1079 X=12.16 Y=17.14 Z=0.4535
1080 X=12.16 Y=18.62 Z=0.4535
1081 X=12.16 Y=20.1 Z=0.4535
1082 X=12.16 Y=21.58 Z=0.4535
1083 X=12.16 Y=23.06 Z=0.4535
1084 X=12.16 Y=24.54 Z=0.4535
1085 X=12.16 Y=26.02 Z=0.4535
1086 X=12.16 Y=27.5 Z=0.4535
1087 X=12.16 Y=28.98 Z=0.4535
1088 X=12.16 Y=30.46 Z=0.4535

1089 X=13.66933 Y=14.18 Z=0.4535
 1090 X=15.17867 Y=14.18 Z=0.4535
 1091 X=15.17867 Y=31.94 Z=0.4535
 1092 X=13.66933 Y=31.94 Z=0.4535
 1093 X=6.08 Y=0 Z=0
 1094 X=6.08 Y=3.844 Z=0
 1095 X=6.08 Y=7.688 Z=0
 1096 X=6.08 Y=11.533 Z=0
 1097 X=6.08 Y=15.377 Z=0
 1098 X=6.08 Y=19.221 Z=0
 1099 X=6.08 Y=23.065 Z=0
 1100 X=6.08 Y=26.909 Z=0
 1101 X=6.08 Y=30.753 Z=0
 1102 X=6.08 Y=34.598 Z=0
 1103 X=6.08 Y=38.442 Z=0
 1104 X=6.08 Y=42.286 Z=0
 1105 X=6.08 Y=46.13 Z=0

SHELL

NM=1 O=1

I E=29000 U=0.3 W=0 M=0 TA=0

1 JQ=1,2,8,9 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=6,12
 289 JQ=4,339,11,343 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 290 JQ=11,343,18,347 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 291 JQ=18,347,25,351 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 292 JQ=25,351,32,355 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 293 JQ=32,355,39,359 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 294 JQ=39,359,46,363 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 295 JQ=46,363,53,367 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 296 JQ=53,367,60,371 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 297 JQ=60,371,67,375 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 298 JQ=67,375,74,379 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 299 JQ=74,379,81,383 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 300 JQ=81,383,88,387 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 301 JQ=342,101,346,120 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 302 JQ=346,120,350,139 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 303 JQ=350,139,354,158 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 304 JQ=354,158,358,177 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 305 JQ=358,177,362,196 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 306 JQ=362,196,366,215 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 307 JQ=366,215,370,234 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 308 JQ=370,234,374,253 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 309 JQ=374,253,378,272 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 310 JQ=378,272,382,291 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 311 JQ=382,291,386,310 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 312 JQ=386,310,390,329 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 349 JQ=153,391,154,392 ETYPE=0 M=1 TZ=0 TH=0.505,0.505 LP=0 G=1,10
 359 JQ=391,402,392,403 ETYPE=0 M=1 TZ=0 TH=0.505,0.505 LP=0 G=9,10
 449 JQ=490,661,491,662 ETYPE=0 M=1 TZ=0 TH=0.505,0.505 LP=0 G=1,10
 459 JQ=661,672,662,673 ETYPE=0 M=1 TZ=0 TH=0.505,0.505 LP=0 G=9,10
 549 JQ=267,501,268,502 ETYPE=0 M=1 TZ=0 TH=0.505,0.505 LP=0 G=1,10
 559 JQ=501,512,502,513 ETYPE=0 M=1 TZ=0 TH=0.505,0.505 LP=0 G=9,10
 649 JQ=600,771,601,772 ETYPE=0 M=1 TZ=0 TH=0.505,0.505 LP=0 G=1,10
 659 JQ=771,782,772,783 ETYPE=0 M=1 TZ=0 TH=0.505,0.505 LP=0 G=9,10

764 JQ=495,666,620,881 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 765 JQ=666,677,881,882 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 766 JQ=677,688,882,883 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 767 JQ=688,699,883,884 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 768 JQ=699,710,884,885 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 769 JQ=710,721,885,886 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 770 JQ=721,732,886,887 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 771 JQ=732,743,887,888 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 772 JQ=743,754,888,889 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 773 JQ=754,765,889,890 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 783 JQ=660,921,605,776 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 784 JQ=921,922,776,787 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 785 JQ=922,923,787,798 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 786 JQ=923,924,798,809 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 787 JQ=924,925,809,820 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 788 JQ=925,926,820,831 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 789 JQ=926,927,831,842 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 790 JQ=927,928,842,853 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 791 JQ=928,929,853,864 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 792 JQ=929,930,864,875 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 829 JQ=620,881,630,891 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 830 JQ=630,891,640,901 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 831 JQ=640,901,650,911 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 832 JQ=650,911,660,921 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 833 JQ=881,882,891,892 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=9,4
 870 JQ=407,418,932,933 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 871 JQ=418,429,933,934 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 872 JQ=429,440,934,935 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 873 JQ=440,451,935,936 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 874 JQ=451,462,936,937 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 875 JQ=462,473,937,938 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 869 JQ=396,407,931,932 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 876 JQ=931,932,940,941 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=7,1
 883 JQ=940,941,611,612 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=7,1
 890 JQ=611,612,950,951 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=7,1
 897 JQ=950,951,960,961 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=7,1
 904 JQ=960,961,621,622 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=7,1
 911 JQ=621,622,969,970 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=7,1
 918 JQ=969,970,978,979 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=7,1
 925 JQ=978,979,631,632 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=7,1
 932 JQ=631,632,987,988 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=7,1
 939 JQ=987,988,996,997 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=7,1
 946 JQ=996,997,641,642 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=7,1
 953 JQ=641,642,1005,1006 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=7,1
 960 JQ=1005,1006,1014,1015 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=7,1
 967 JQ=1014,1015,651,652 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=7,1
 974 JQ=651,652,1023,1024 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=7,1
 981 JQ=1023,1024,1032,1033 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=7,1
 988 JQ=1032,1033,506,517 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 989 JQ=1033,1034,517,528 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 990 JQ=1034,1035,528,539 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 991 JQ=1035,1036,539,550 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 992 JQ=1036,1037,550,561 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 993 JQ=1037,1038,561,572 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1

994 JQ=1038,1039,572,583 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 995 JQ=473,495,938,939 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 996 JQ=947,949,618,620 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 997 JQ=938,939,947,949 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 998 JQ=939,495,949,620 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 999 JQ=618,620,957,958 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1000 JQ=967,968,628,630 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1001 JQ=957,958,967,968 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1002 JQ=958,620,968,630 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1003 JQ=628,630,976,977 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1004 JQ=976,977,985,986 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1005 JQ=985,986,638,640 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1006 JQ=977,630,986,640 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1007 JQ=638,640,994,995 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1008 JQ=994,995,1003,1004 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1009 JQ=1003,1004,648,650 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1010 JQ=995,640,1004,650 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1011 JQ=648,650,1012,1013 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1012 JQ=1012,1013,1021,1022 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1013 JQ=1021,1022,658,660 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1014 JQ=1013,650,1022,660 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1015 JQ=658,660,1030,1031 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1016 JQ=1030,1031,1039,1040 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1017 JQ=1039,1040,583,605 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1018 JQ=1031,660,1040,605 ETYPE=0 M=1 TZ=0 TH=0.395,0.395 LP=0 G=1,1
 1019 JQ=1078,1067,1079,1068 ETYPE=0 M=1 TZ=0 TH=0.512,0.512 LP=0 G=3,10
 1049 JQ=1041,1089,1078,1067 ETYPE=0 M=1 TZ=0 TH=0.512,0.512 LP=0 G=1,1
 1050 JQ=1089,1090,1067,1056 ETYPE=0 M=1 TZ=0 TH=0.512,0.512 LP=0 G=1,1
 1051 JQ=1090,1042,1056,1045 ETYPE=0 M=1 TZ=0 TH=0.512,0.512 LP=0 G=1,1
 1052 JQ=1088,1077,1043,1092 ETYPE=0 M=1 TZ=0 TH=0.512,0.512 LP=0 G=1,1
 1053 JQ=1077,1066,1092,1091 ETYPE=0 M=1 TZ=0 TH=0.512,0.512 LP=0 G=1,1
 1054 JQ=1066,1055,1091,1044 ETYPE=0 M=1 TZ=0 TH=0.512,0.512 LP=0 G=1,1
 73 JQ=92,93,111,112 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=18,3
 127 JQ=263,264,282,283 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=18,3
 181 JQ=158,177,1041,1078 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 183 JQ=1078,176,1079,195 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 182 JQ=1079,177,1080,196 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 184 JQ=1080,1081,195,214 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 185 JQ=1081,196,1082,215 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 186 JQ=1082,1083,214,233 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 187 JQ=1083,215,1084,234 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 189 JQ=1085,233,1086,252 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 190 JQ=1078,177,1079 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 191 JQ=195,1079,1080 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 192 JQ=1080,196,1081 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 193 JQ=176,157,1078,1041 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 194 JQ=1081,1082,214 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 195 JQ=1082,215,1083 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 196 JQ=1083,1084,233 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 197 JQ=1084,234,1085 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 198 JQ=1084,1085,233 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 199 JQ=1085,234,1086 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 200 JQ=272,1043,253,1088 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 201 JQ=252,1088,271,1043 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1

202 JQ=1086,1087,234,253 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 203 JQ=1086,1087,252 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 204 JQ=1087,1088,252 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 205 JQ=1087,253,1088 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=1,1
 206 JQ=149,150,168,169 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=8,6
 1055 JQ=158,159,177,178 ETYPE=0 M=1 TZ=0 TH=1.25,1.25 LP=0 G=9,6
 313 JQ=339,340,343,344 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,12
 325 JQ=341,342,345,346 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,12
 1109 JQ=340,1093,344,1094 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1110 JQ=344,1094,348,1095 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1111 JQ=348,1095,352,1096 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1112 JQ=352,1096,356,1097 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1113 JQ=356,1097,360,1098 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1114 JQ=360,1098,364,1099 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1115 JQ=364,1099,368,1100 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1116 JQ=368,1100,372,1101 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1117 JQ=372,1101,376,1102 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1118 JQ=376,1102,380,1103 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1119 JQ=380,1103,384,1104 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1120 JQ=384,1104,388,1105 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1121 JQ=1093,341,1094,345 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1122 JQ=1094,345,1095,349 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1123 JQ=1095,349,1096,353 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1124 JQ=1096,353,1097,357 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1125 JQ=1097,357,1098,361 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1126 JQ=1098,361,1099,365 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1127 JQ=1099,365,1100,369 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1128 JQ=1100,369,1101,373 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1129 JQ=1101,373,1102,377 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1130 JQ=1102,377,1103,381 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1131 JQ=1103,381,1104,385 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1
 1132 JQ=1104,385,1105,389 ETYPE=0 M=1 TZ=0 TH=0.79,0.79 LP=0 G=1,1

RESTRAINTS

1099 1099 1 R=1,0,1,0,0,0
 910 910 1 R=0,1,1,0,0,0
 1093 1093 1 R=0,1,1,0,0,0
 1105 1105 1 R=0,0,1,0,0,0
 765 875 110 R=0,0,1,0,0,0

CONSTRAINTS

1056 1056 1 C=616,616,616,0,0,0 I=0,0,0,0,0
 1058 1058 1 C=965,965,965,0,0,0 I=0,0,0,0,0
 1060 1060 1 C=983,983,983,0,0,0 I=0,0,0,0,0
 1062 1062 1 C=992,992,992,0,0,0 I=0,0,0,0,0
 1064 1064 1 C=646,646,646,0,0,0 I=0,0,0,0,0
 1066 1066 1 C=1019,1019,1019,0,0,0 I=0,0,0,0,0

LOADS

1 7 6 L=1 F=0,0.85294,0,0,0,0
 2 3 1 L=1 F=0,1.7069,0,0,0,0
 5 6 1 L=1 F=0,1.7069,0,0,0,0
 4 4 1 L=1 F=-0.097564,2.2031,0,0,0,0
 92 110 18 L=1 F=0,0.089355,0,0,0,0

93 100 1 L=1 F=0,0.17871,0,0,0,0
102 109 1 L=1 F=0,0.17871,0,0,0,0
101 101 1 L=1 F=-0.097564,0.08789,0,0,0,0
339 339 1 L=1 F=-0.19513,1.0101,0,0,0,0
340 340 1 L=1 F=-0.14635,0.68371,0,0,0,0
341 341 1 L=1 F=-0.14635,0.56629,0,0,0,0
342 342 1 L=1 F=-0.19513,0.65788,0,0,0,0
1093 1093 1 L=1 F=-0.097564,0,0,0,0,0
85 91 6 L=1 F=0,-0.28806,0,0,0,0
86 87 1 L=1 F=0,-0.57712,0,0,0,0
89 90 1 L=1 F=0,-0.57712,0,0,0,0
88 88 1 L=1 F=0.097564,-0.4934,0,0,0,0
320 338 18 L=1 F=0,-0.29164,0,0,0,0
321 328 1 L=1 F=0,-0.58329,0,0,0,0
330 337 1 L=1 F=0,-0.58329,0,0,0,0
329 329 1 L=1 F=0.097564,-1.0866,0,0,0,0
387 387 1 L=1 F=0.19513,-0.68888,0,0,0,0
388 388 1 L=1 F=0.14635,-0.58929,0,0,0,0
389 389 1 L=1 F=0.14635,-0.70671,0,0,0,0
390 390 1 L=1 F=0.19513,-1.0411,0,0,0,0
1105 1105 1 L=1 F=0.097564,-0.432,0,0,0,0
760 770 10 L=1 F=0.17121,0,0,0,0,0
761 764 1 L=1 F=0.34241,0,0,0,0,0
766 769 1 L=1 F=0.34241,0,0,0,0,0
765 765 1 L=1 F=1.3186,0.052741,0,0,0,0
870 880 10 L=1 F=-0.17121,0,0,0,0,0
871 874 1 L=1 F=-0.34241,0,0,0,0,0
876 879 1 L=1 F=-0.34241,0,0,0,0,0
875 875 1 L=1 F=-1.3186,0.052741,0,0,0,0
890 890 1 L=1 F=0.65076,0.10548,0,0,0,0
900 900 1 L=1 F=0.32538,0.10548,0,0,0,0
920 920 1 L=1 F=-0.32538,0.10548,0,0,0,0
930 930 1 L=1 F=-0.65076,0.10548,0,0,0,0